

INFANTRY RESOURCES	
Ammunition 30 mm	
Round 30 mm HE M93 P1	7
Round 30 mm TP M93 P1	8
Round 30 mm PM M93 P1	9
Ammunition 40 mm x 46	
Round 40 mm x 46 HE-SD M99 P1	10
Round 40 mm x 46 HE-SD M14	11
Round 40 mm x 46 HE M99	12
Round 40 mm x 46 HE M17	13
Round 40 mm x 46 HEDP M99	14
Round 40 mm x 46 HEDP M99 P1	15
Round 40 mm x 46 HEDP-SD M11	16
Round 40 mm x 46 HEDP-SD M17	17
Round 40 mm x 46 practice M99	18
Round 40 mm x 46 TPSFM M04	19
Round 40 mm x 46 smoke M99	20
Round 40 mm x 46 smoke colored M99	21
Round 40 mm x 46 smoke CS M99	22
Round 40 mm x 46 three part smoke CS M11	23
Round 40 mm x 46 S&F M01 with impact fuze	24
Round 40 mm x 46 S&F M99 with delay	25
Round 40 mm x 46 illuminating with parachute M04	26
Round 40 mm x 46 impulse M13 P1	27
Round 40 mm x 46 with rubber balls	28
Round 40 mm x 46 TP M07 (with orange dye)	29
Round 40 mm x 46 TP-T M18 (with orange dye)	30
Round 40 mm x 46 thermobaric M18	31
Ammunition 40 mm	
Round 40 mm HE M03	32
Round 40 mm HE-SD M06 P1	33
Round 40 mm HE bounding M12	34
Round 40 mm HEDP M04	35
Round 40 mm practice M03	36
Round 40 mm smoke M04	37
Round 40 mm illuminating with parachute M04	38
Round 40 mm stun&flash M12	39
Rifle grenades 30 mm	
Rifle grenade HE M99 with bullet trap	40
Rifle grenade TP M99 with bullet trap	41
Rifle grenade HE M60 P1	42
Rifle grenades 40 mm	
Rifle grenade HE M03 with bullet trap	43
Rifle grenade smoke M62	44
Rifle grenade smoke M04 with bullet trap	45
Rifle grenade illuminating M62	46
Rifle grenade illuminating M08 with bullet trap	47



INFANTRY RESOURCES

Rifle grenades 60 mm	
Rifle grenade antitank M60 P1	48
Rocket weapon 64 mm	
Hand-held rocket launcher 64 mm RBR M80	49
Rocket weapon 90 mm	
Hand-held rocket launcher 90 mm RBR M79A	50
Rocket weapon 120 mm	
Hand-held rocket launcher 120 mm RBR M91	51
Rockets 57 mm	
Illuminating rocket 57 mm M17	52
ERO elements	
Flat explosive element EE1-R333S	53
Flat explosive element EE2-R662S and profiled explosive element EE2-P131S	54
Mines 120 mm	
EBT 120 mm M18	55
Warheads 130 mm	
HE fragmentation warhead 130 mm M1	56
Fuzes	
Universal fuze for mortar shells UT M18	57
Special purpose resources 26.5 mm	
Trip flare 26.5 mm	58
Signal ammunition 26.5 mm	
Signal cartridge 26.5 mm ABC / LP 57	59
Signal cartridge 26.5 mm with parachute / LP 57	60
Signal cartridge 26.5 mm white / LP 57	61
Signal cartridge 26.5 mm red / LP 57	62
Signal cartridge 26.5 mm green / LP 57	63
Signal cartridge 26.5 mm smoke violet / LP 57	64
Ammunition 38 mm	
Cartridge 38 mm with rubber balls P1	65
Cartridge 38 mm with single baton rubber P1	66
Cartridge 38 mm with three part baton rubber P1	67
Cartridge 38 mm signal (red, white, green)	68
Cartridge 38 mm smoke	69
Cartridge 38 mm smoke CS	70
Hand grenades 40 mm	
Grenade hand stun&flash three part M13 (40 mm)	71
Grenade hand smoke three part CS	72
Hand grenades 45 mm	
Grenade hand stun&flash (45 mm)	73
Grenade hand smoke (45 mm)	74
Hand grenades 53 mm	
Grenade hand smoke (53 mm)	75
Smoke grenades 81 mm	
81 mm smoke grenade GD2	76
Smoke grenades 82 mm	
Grenade 82 mm smoke pot M79	77

ANTI-AIRCRAFT RESOURCES	
Ammunition 20 mm x 102	
Round 20 mm x 102 HE/HEI	78
Round 20 mm x 102 AP	79
Round 20 mm x 102 AP-T	80
Round 20 mm x 102 TP	81
Ammunition 20 mm x 110 Hispano	
Round 20 mm x 110 HE/HEI	82
Round 20 mm x 110 HE-T/HEI-T	83
Round 20 mm x 110 AP-T	84
Round 20 mm x 110 API	85
Round 20 mm x 110 API-T	86
Round 20 mm x 110 TP	87
Round 20 mm x 110 TP-T	88
Ammunition 20 mm x 110 Subcaliber barrels	
Round 20 mm x 110 TP	89
Round 20 mm x 110 TP-T	90
Ammunition 20 mm x 110RB	
Round 20 mm x 110RB HE/HEI	91
Round 20 mm x 110RB HE-T/HEI-T	92
Round 20 mm x 110RB AP-T	93
Round 20 mm x 110RB API	94
Round 20 mm x 110RB TP	95
Round 20 mm x 110RB TP-T	96
Ammunition 23 mm x 115	
Round 23 mm x 115 HE/HEI	97
Round 23 mm x 115 HE-T/HEI-T	98
Round 23 mm x 115 API	99
Round 23 mm x 115 API-T	100
Round 23 mm x 115 TP	101
Round 23 mm x 115 TP-T	102
Ammunition 23 mm x 152B	
Round 23 mm x 152B HE/HEI	103
Round 23 mm x 152B HE-T/HEI-T	104
Round 23 mm x 152B API	105
Round 23 mm x 152B API-T	106
Round 23 mm x 152B TP	107
Round 23 mm x 152B TP-T	108



Ammunition 30 mm x 165 for AK-630M...	
Round 30 mm x 165 HE/HEI	109
Round 30 mm x 165 HE-T/HEI-T	110
Round 30 mm x 165 AP	111
Round 30 mm x 165 AP-T	112
Round 30 mm x 165 TP	113
Round 30 mm x 165 TP-T	114
Ammunition 30 mm x 165 for GSh-301...	
Round 30 mm x 165 HE/HEI	115
Round 30 mm x 165 AP	116
Round 30 mm x 165 AP-T	117
Round 30 mm x 165 TP	118
Ammunition 30 mm x 165 for 2A42, 2A72...	
Round 30 mm x 165 HE/HEI	119
Round 30 mm x 165 HE-T/HEI-T	120
Round 30 mm x 165 AP	121
Round 30 mm x 165 AP-T	122
Round 30 mm x 165 TP	123
Round 30 mm x 165 TP-T	124
Ammunition 30 mm x 173	
Round 30 mm x 173 HE/HEI	125
Round 30 mm x 173 AP	126
Round 30 mm x 173 TP	127
Ammunition 30 mm x 210B	
Round 30 mm x 210B HE/HEI	128
Ammunition 30 mm x 220	
Round 30 mm x 220 HE-T/HEI-T	129
Ammunition 37 mm x 252	
Round 37 mm x 252 HE-T/HEI-T	130
Ammunition 40 mm x 311	
Round 40 mm x 311 HE/HEI	131
Round 40 mm x 311 HE-T/HEI-T	132
Round 40 mm x 311 TP	133
Ammunition 40 mm x 365	
Round 40 mm x 365 HE/HEI	134
Round 40 mm x 365 HE-T/HEI-T	135
Round 40 mm x 365 AP	136
Round 40 mm x 365 AP-T	137
Round 40 mm x 365 TP	138
Round 40 mm x 365 TP-T	139
Ammunition 57 mm x 348	
Round 57 mm x 348 HE-T	140
Ammunition 57 mm x 438	
Round 57 mm x 438 HE	141
Round 57 mm x 438 TP	142

ARTILLERY RESOURCES	
Ammunition 76 mm M48 B-1	
Round 76 mm with projectile HE M70 and variable propellant charge M70	143
Round 76 mm with smoke projectile M60 and variable propellant charge M70	144
Round 76 mm BLANK (SALUTE)	145
Ammunition 76 mm ZIS-3	
Round 76 mm with projectile HE M70 and variable propellant charge M70	146
Round 76 mm with smoke projectile M60 and variable propellant charge M70	147
Round 76 mm BLANK (SALUTE)	148
Ammunition 100 mm	
Round 100 mm fixed with HE projectile M63P2 with full propellant charge	149
Round 100 mm fixed with high-explosive projectile M82 with full propellant charge	150
Round 100 mm fixed with HEAT-T M15	151
Ammunition 105 mm M56	
Round 105 mm with projectile HE M1 and propellant charge M2	152
Round 105 mm with projectile HE ER-BT M15 and full variable propellant charge M15A	153
Round 105 mm with projectile HE ER-BB M15 and full propellant charge M15A	154
Round 105 mm with smoke projectile WP M60 and propellant charge M2	155
Round 105 mm with illuminating projectile M314A4 and propellant charge M2	156
Round 105 mm BLANK (SALUTE)	157
Ammunition 105 mm M56/33	
Round 105 mm with projectile HE M1 and propellant charge M2	158
Round 105 mm with projectile HE ER-BT M15 and full variable propellant charge M15	159
Round 105 mm with projectile HE ER-BB M15 and full propellant charge M15	160
Round 105 mm with smoke projectile WP M60 and propellant charge M2	161
Ammunition 122 mm	
Round 122 mm with projectile HE 462A1 and full propellant charge M78	162
Round 122 mm with projectile HE 462A1 and reduced variable propellant charge M78	163
Round 122 mm with projectile HE ER M10 and full variable propellant charge M10	164
Round 122 mm with projectile HE ER-BB M10 and base propellant charge M10	165
Round 122 mm with projectile WP M60 and full propellant charge M78	166
Round 122 mm with projectile WP M60 and reduced variable propellant charge M78	167
Round 122 mm with illuminating projectile S-463 and full propellant charge M78	168
Round 122 mm with illuminating projectile S-463 and reduced variable propellant charge M78	169
Round 122 mm BLANK (SALUTE)	170
Ammunition 125 mm	
Round 125 mm with projectile HE M86P2	171
Round 125 mm with subcaliber projectile APFSDS-T M88	172
Round 125 mm with projectile HEAT-T M88P1	173
Round 125 mm with training projectile HEAT-T M17	174
Ammunition 130 mm	
Round 130 mm with high-explosive projectile M79 and full variable propellant charge M46	175
Round 130 mm with high-explosive projectile M79 and reduced variable propellant charge M46	176
Round 130 mm with high-explosive projectile M93 with base-bleed and full propellant charge M93A	177
Ammunition 152 mm	
Round 152 mm with high-explosive projectile M88 and full variable propellant charge M77	178
Round 152 mm with high-explosive projectile M88 and reduced variable propellant charge M77	179



Ammunition 155 mm	
Round 155 mm with high-explosive projectile M107 and propellant charge M3A1	180
Round 155 mm with high-explosive projectile M107 and propellant charge M4A2	181
Round 155 mm with high-explosive projectile M107 and propellant charge M119A1	182
Round 155 mm with projectile WP M110A2 and propellant charge M3A1	183
Round 155 mm with projectile WP M110A2 and propellant charge M4A2	184
Round 155 mm with projectile WP M110A2 and propellant charge M119A1	185
Round 155 mm with illuminating projectile M485A2 and propellant charge M3A1	186
Round 155 mm with illuminating projectile M485A2 and propellant charge M4A2	187
Round 155 mm with illuminating projectile M485A2 and propellant charge M119A1	188
Round 155 mm with high-explosive projectile M101 and propellant charge MC zone 9	189
Round 155 mm with high-explosive projectile M107 and propellant charge MC zone 8	190
Round 155 mm with projectile HEER-BT M19 and propellant charge MC zone 9	191
Round 155 mm with projectile HEER-BT M19 and propellant charge MC zone 10	192
Round 155 mm with projectile HEER-BB M19 and propellant charge MC zone 9	193
Round 155 mm with projectile HEER-BB M19 and propellant charge MC zone 10	194
Round 155 mm with projectile HE ERFB M03 and propellant charge MC zone 9	195
Round 155 mm with projectile HE ERFB M03 and propellant charge MC zone 10	196
Round 155 mm with projectile HE ERFB-BB M03 and propellant charge MC zone 9	197
Round 155 mm with projectile HE ERFB-BB M03 and propellant charge MC zone 10	198
Round 155 mm with projectile ERFB SMOKE (WP) M09 and propellant charge MC zone 9	199
Round 155 mm with projectile ERFB SMOKE (WP) M09 and propellant charge MC zone 10	200
Fuzes	
Fuze UTI M68P1	201
Fuze UTIU M72B1	202
Fuze UTIU M72B2	203
Fuze UTIU M72B3	204
Fuze UTIU M85P1	205
Fuze UTIU M02	206
Fuze UTIU M02P1	207
Fuze UT-PE M69	208
Fuze UT-PE M87P1	209
Fuze UTE M03	210
Fuze UTE M03A1	211
Fuze UTE M10	212
Fuze UTE M10A1	213
Fuze UB M16	214
Fuze UMF M16	215
Fuze setting devices	
UTIF	216
Gun primers	
Gun primer KT M28A2	217
Gun primer KT M28P1	218
Gun primer KT M71	219
Gun primer KT M82P2	220
Gun primer KT-EU M84	221
Gun primer KT M1	222
Gun primer KT M02	223

ROUND 30 mm HE M93 P1



The round 30 mm HE M93 P1 is designated for action from automatic grenade launcher on targets on the ground out of shelters and in shelters at distances up to 1700 m.

Technical Data

Calibre (mm)	30
Round mass (g)	360
Grenade mass (g)	273
Round length (mm)	132
Muzzle velocity (m/s)	185
Rate of fire (rounds/min.)	min 350
Precision on vertical target, at the distance of 100 m (m)	$V_p \leq 0.08$ $V_v \leq 0.08$
Max range (m)	1700
Lethal radius (m)	6
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: AGL-30 mm, BGA-30 mm, AGS-17, KBA-117 or other similar weapons



Ammunition 30 mm



**ROUND 30 mm
TP M93 P1**

Technical Data

Calibre (mm)	30
Round mass (g)	360
Grenade mass (g)	273
Round length (mm)	132
Muzzle velocity (m/s)	185
Precision on vertical target, at the distance of 100 m (m)	$V_p \leq 0.08$ $V_v \leq 0.08$
Operating temperature (°C)	-30 ÷ +50

The round 30 mm TP M93 P1 is intended for personnel training for use of 30 mm automatic grenade launcher M93 as well as 30 mm Russian grenade launcher AGS-17 at distances up to 1700 m.

WEAPON COMPATIBILITY: AGL-30 mm, BGA-30 mm, AGS-17, KBA-117 or other similar weapons

ROUND 30 mm PM M93 P1



The round 30 mm PM M93 P1 (Practice Marking) is intended for personnel training for use of 30 mm automatic grenade launcher.

It can be used from 30 mm automatic grenade launcher M93 as well as 30 mm Russian grenade launcher AGS-17 at distances up to 1700 m.

Technical Data

Calibre (mm)	30
Round mass (g)	360
Grenade mass (g)	273
Round length (mm)	132
Muzzle velocity (m/s)	185
Precision on vertical target, at the distance of 100 m (m)	$V_p \leq 0.08$ $V_v \leq 0.08$
Max range (m)	1700
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: AGL-30 mm, BGA-30 mm, AGS-17, KBA-117 or other similar weapons


Sloboda


ROUND 40 mm x 46 HE-SD M99 P1

Technical Data

Calibre (mm)	40
Round mass (g)	245
Grenade mass (g)	192
Explosive mass (g)	48
Round length (mm)	104.5
Muzzle velocity (m/s)	76
Fuze arming distance (m)	8 ÷ 30
Fuze self-destruct time (s)	12 ÷ 20
Precision on vertical target, at the distance of 100 m (m)	$V_p \leq 0.25$ $V_v \leq 0.35$
Max range (m)	400
Lethal radius (m)	≥ 5
Operating temperature (°C)	-42 ÷ +63

The round 40 mm x 46 HE-SD M99 P1 is designated for firing from the grenade launcher 40 mm of NATO system of low velocity (LV) aiming at targets on the ground out of shelters and in shelters at utility range from 50 m to 400 m.

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000 or other similar weapons

ROUND 40 mm x 46 HE-SD M14



NEW

The round 40 mm x 46 HE-SD M14 is designated for firing from the grenade launcher 40 mm of NATO system of low velocity (LV) aiming at targets on the ground out of shelters and in shelters at utility range from 50 m to 400 m.

Technical Data

Calibre (mm)	40
Round mass (g)	237
Grenade mass (g)	186
Muzzle velocity (m/s)	78
Fuze arming distance (m)	8 ÷ 30
Fuze self-destruct time (s)	12 ÷ 20
Max range (m)	400
Lethal radius (m)	≥ 5
Operating temperature (°C)	-42 ÷ +63

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000 or other similar weapons



Sloboda



ROUND 40 mm x 46 HE M99

Technical Data

Calibre (mm)	40
Round mass (g)	245
Grenade mass (g)	192
Muzzle velocity (m/s)	78
Fuze arming distance (m)	14 ÷ 27
Max range (m)	400
Lethal radius (m)	≥ 5
Operating temperature (°C)	-42 ÷ +63

The round 40 mm x 46 HE M99 is designated for firing from the grenade launcher 40 mm of NATO system of low velocity (LV) aiming at targets on the ground out of shelters and in shelters at utility range from 50 m to 400 m.

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000 or other similar weapons

ROUND 40 mm x 46 HE M17



NEW

The round 40 mm x 46 HE M17 is designated for firing from the grenade launcher 40 mm of NATO system of low velocity (LV) aiming at targets on the ground out of shelters and in shelters at utility range from 50 m to 400 m.

Technical Data

Calibre (mm)	40
Round mass (g)	240
Grenade mass (g)	188
Muzzle velocity (m/s)	78
Fuze arming distance (m)	14 ÷ 27
Max range (m)	400
Lethal radius (m)	≥ 5
Operating temperature (°C)	-42 ÷ +63

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000 or other similar weapons



Ammunition 40 mm x 46



**ROUND 40 mm x 46
HEDP M99**

Technical Data

Calibre (mm)	40
Round mass (g)	252
Grenade mass (g)	200
Explosive mass (g)	42
Round length (mm)	max 106.5
Muzzle velocity (m/s)	78
Fuze arming distance (m)	8 ÷ 30
Precision on vertical target, at the distance of 100 m (m)	$V_p \leq 0.25$ $V_v \leq 0.35$
Max range (m)	400
Penetration (mm of steel plate)	60
Lethal radius (m)	≥ 5
Operating temperature (°C)	-42 ÷ +63

The round 40 mm x 46 HEDP M99 is intended for firing from grenade launcher 40 mm of NATO system of low velocity.

It is used against humans, light armored vehicles and technical and material means.

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000 or other similar weapons

ROUND 40 mm x 46 HEDP M99 P1



NEW

The round 40 mm x 46 HEDP M99 P1 is intended for firing from grenade launcher 40 mm of NATO system of low velocity.

It is used against humans, light armored vehicles and technical and material means.

Technical Data

Calibre (mm)	40
Round mass (g)	252
Grenade mass (g)	200
Explosive mass (g)	45
Round length (mm)	max 106.5
Muzzle velocity (m/s)	78
Fuze arming distance (m)	8 ÷ 30
Precision on vertical target, at the distance of 100 m (m)	$V_p \leq 0.25$ $V_v \leq 0.35$
Max range (m)	400
Penetration (mm of steel plate)	65
Lethal radius (m)	≥ 5
Operating temperature (°C)	-42 ÷ +63

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000 or other similar weapons


Sloboda


ROUND 40 mm x 46 HEDP-SD M11

Technical Data

NEW

Calibre (mm)	40
Round mass (g)	260
Grenade mass (g)	208
Muzzle velocity (m/s)	78
Fuze arming distance (m)	8 ÷ 30
Fuze self-destruction time (s)	12 ÷ 20
Max range (m)	400
Penetration (mm of steel plate)	60
Lethal radius (m)	≥ 5
Operating temperature (°C)	-46 ÷ +63

The round 40 mm x 46 HEDP-SD M11 is intended for firing from grenade launcher 40 mm of NATO system of low velocity.

It is used against humans, light armored vehicles and technical and material means.

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000, VHS-BG or other similar weapons

ROUND 40 mm x 46 HEDP-SD M17



NEW

The round 40 mm x 46 HEDP-SD M17 is intended for firing from grenade launcher 40 mm of NATO system of low velocity.

It is used against humans, light armored vehicles and technical and material means.

Technical Data

Calibre (mm)	40
Round mass (g)	250
Grenade mass (g)	198
Muzzle velocity (m/s)	78
Fuze arming distance (m)	8 ÷ 30
Fuze self-destruction time (s)	12 ÷ 20
Max range (m)	400
Penetration (mm of steel plate)	60
Lethal radius (m)	≥ 5
Operating temperature (°C)	-42 ÷ +63

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000, VHS-BG or other similar weapons


Sloboda


ROUND 40 mm x 46 PRACTICE M99

Technical Data

Calibre (mm)	40
Round mass (g)	245
Grenade mass (g)	192
Round length (mm)	max 104.5
Muzzle velocity (m/s)	78
Precision on vertical target at the distance of 100 m (m)	$V_p \leq 0.25$ $V_v \leq 0.35$
Max range (m)	400
Operating temperature (°C)	-42 ÷ +63

The round 40 mm x 46 practice M99 is designated for determination of precision of weapon and training and definition of process of firing for grenade launcher 40 mm of NATO system of low velocity (LV) at utility range from 50 m to 400 m.

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000, M148, MSGL40, CZ 805 G1, CIS 40 GL or other similar weapons

ROUND 40 mm x 46 TPSFM M04



Technical Data

The round 40 mm x 46 TPSFM M04 (Training Practice, Sound, Flash and Marking Round) is designated for personnel training for use of grenade launcher 40 mm of NATO system of low velocity (LV) at distances up to 400 m.

Calibre (mm)	40
Round mass (g)	233
Grenade mass (g)	181
Round length (mm)	104
Smoke type	white
Bursting sound upon impact (dB)	80
Muzzle velocity (m/s)	78
Fuze arming distance (m)	8 ÷ 30
Precision on vertical target at the distance of 100 m (m)	$V_p \leq 0.25$ $V_v \leq 0.35$
Max range (m)	400
Operating temperature (°C)	-42 ÷ +63

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000 or other similar weapons



**ROUND 40 mm x 46
SMOKE M99**

Technical Data

Calibre (mm)	40
Round mass (g)	236
Grenade mass (g)	186
Round length (mm)	106
Delay time (s)	2 ÷ 4
Smoke time (s)	30
Muzzle velocity (m/s)	76
Firing range (m)	50 ÷ 400
Smoke type	white
Operating temperature (°C)	-42 ÷ +63

The round 40 mm x 46 smoke M99 is intended for firing from grenade launcher 40 mm of NATO system of low velocity, for creating of smoke screens and smoking of different terrains at distances up to 400 m.

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000 or other similar weapons

ROUND 40 mm x 46 SMOKE COLORED M99



NEW

The round 40 mm x 46 smoke colored M99 is intended for firing from grenade launcher 40 mm of NATO system of low velocity, for creating the smoke screens, for distributing smoke on the various terrains and for signaling.

Technical Data

Calibre (mm)	40
Round mass (g)	210
Grenade mass (g)	158
Round length (mm)	106
Delay time (s)	2 ÷ 4
Smoke time (s)	20
Muzzle velocity (m/s)	76
Firing range (m)	50 ÷ 400
Smoke type	green, red, yellow, orange
Operating temperature (°C)	-42 ÷ +63

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000 or other similar weapons


Sloboda


ROUND 40 mm x 46 SMOKE CS M99

Technical Data

Calibre (mm)	40
Round mass (g)	210
Grenade mass (g)	158
Round length (mm)	106
Delay time (s)	2 ÷ 4
Smoke time (s)	20
Muzzle velocity (m/s)	76
Firing range (m)	50 ÷ 400
Operating temperature (°C)	-42 ÷ +63

The round 40 mm x 46 smoke CS M99 is intended for firing from grenade launcher 40 mm of NATO system of low velocity.

It is used by special forces of the Army and the police, for anti-terrorist actions, as well as for preventing and disabling any riots at the range from 50 m up to 400 m.

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000 or other similar weapons

ROUND 40 mm x 46 THREE PART SMOKE CS M11



The round 40 mm x 46 three part smoke CS M11 is intended for firing from grenade launcher 40 mm of NATO system of low velocity.

It is used by special forces of the Army and the police, for anti-terrorist actions, as well as for preventing and disabling any riots.

Technical Data

Calibre (mm)	40
Round mass (g)	200
Grenade mass (g)	155
Round length (mm)	110
Delay time (s)	1 ÷ 1.5
Smoke time (s)	20
Smoke part (pcs)	3
Firing range (m)	50 ÷ 150
Operating temperature (°C)	-42 ÷ +63

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000 or other similar weapons



Sloboda



**ROUND 40 mm x 46
S&F M01
WITH IMPACT FUZE**

Technical Data

Calibre (mm)	40
Round mass (g)	235
Grenade mass (g)	185
Round length (mm)	111
Sound intensity (dB)	120
Fuze arming distance (m)	8 ÷ 35
Muzzle velocity (m/s)	78
Firing range (m)	50 ÷ 400
Operating temperature (°C)	-42 ÷ +63

The round 40 mm x 46 S&F M01 with impact fuze is intended for firing from grenade launcher 40 mm of NATO system of low velocity.

It is used by special forces of the Army and the police for anti-terrorist actions, as well as for preventing and disabling any riots in the open or in closed spaces.

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000 or other similar weapons

ROUND 40 mm x 46 S&F M99 WITH DELAY



Technical Data

The round 40 mm x 46 S&F M99 with delay is intended for firing from grenade launcher 40 mm of NATO system of low velocity.

It is used by special forces of the Army and the police for anti-terrorist actions, as well as for preventing and disabling any riots.

Calibre (mm)	40
Round mass (g)	115
Grenade mass (g)	72
Round length (mm)	87
Delay time (s)	1 ÷ 1.5
Sound intensity (dB)	120
Operating temperature (°C)	-42 ÷ +63

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000 or other similar weapons



Sloboda



ROUND 40 mm x 46 ILLUMINATING WITH PARACHUTE M04

Technical Data

Calibre (mm)	40
Round mass (g)	250
Grenade mass (g)	200
Round length (mm)	134
Delay time (s)	2,5 ÷ 3,5
Burning time of star (s)	20
Light intensity of star (cd)	80000
Middle wave length (nm)	587±5
Height fired at 85° (m)	182±30
Operating temperature (°C)	-30 ÷ +50

The round 40 mm x 46 illuminating with parachute M04 is intended for firing from grenade launcher 40 mm of low velocity, for illuminating of terrain in night conditions and conditions of low visibility.

WEAPON COMPATIBILITY: M203, M79, HK69A1, F2000 or other similar weapons

ROUND 40 mm x 46 IMPULSE M13 P1


NEW

The round 40 mm x 46 impulse M13 P1 is intended for firing from 40 mm grenade launcher of NATO system of low velocities at ranges from 20 m up to 50 m in order to suppress and prevent various types of riots and street protests.

Technical Data

Calibre (mm)	40
Round mass (g)	102
Grenade mass (g)	52
Round length (mm)	max 109
Firing range (m)	20 ÷ 50
Precision on vertical target at the distance of 20 m (m)	$V_p \leq 0.1$ $V_v \leq 0.1$
Kinetic energy at the distance of 20 m (J)	≈ 120
Operating temperature (°C)	-30 ÷ +40

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000 or other similar weapons



Ammunition 40 mm x 46



**ROUND 40 mm x 46
WITH RUBBER BALLS**

Technical Data

Calibre (mm)	40
Round mass (g)	145
Round length (mm)	122.5
Number of rubber balls	24
Ball diameter (mm)	15
Hagomess of rubber (Shore)	80
Precision on vertical waved paper target, at the distance of 25 m	min 15 balls in target
Operating temperature (°C)	-42 ÷ +50

The round 40 mm x 46 with rubber balls is to be used for anti-riot control.

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000 or other similar weapons

ROUND 40 mm x 46 TP M07 (WITH ORANGE DYE)



NEW

The round 40 mm x 46 TP M07, training-marking round with orange powder, is intended for training and determining of firing procedures for 40 mm x 46 grenade launchers LV.

Marking powder from the cap-assembly, which breaks when hitting a target or the ground, marks the hit location.

Technical Data

Calibre (mm)	40
Round mass (g)	230
Grenade mass (g)	180
Round length (mm)	max 103
Muzzle velocity (m/s)	78
Precision on vertical target at the distance of 100 m (m)	$V_p \leq 0.25$ $V_v \leq 0.35$
Max range (m)	400
Operating temperature (°C)	-42 ÷ +63

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000 or other similar weapons



Sloboda



**ROUND 40 mm x 46
TP-T M18
(WITH ORANGE DYE)**

Technical Data

NEW

Calibre (mm)	40
Round mass (g)	235
Grenade mass (g)	185
Round length (mm)	103
Muzzle velocity (m/s)	78
Tracer time (s)	4
Max range (m)	400
Operating temperature (°C)	-30 ÷ +50

The round 40 mm x 46 TP-T M18 (with orange dye), training-practice round with tracer and with orange powder, is intended for training and determining of firing procedures for 40 mm x 46 grenade launchers LV.

Marking powder from the cap-assembly, which breaks when hitting a target or the ground, marks the hit location.

WEAPON COMPATIBILITY: M203, M79, MGL MK1, HK69A1, F2000, FN LG1, CIS 40 GL or other similar weapons

ROUND 40 mm x 46 THERMOBARIC M18



NEW

The round 40 mm x 46 thermobaric M18 is used for destruction of human targets inside shelters and open areas, as well as for the destruction of light armoured and non-armoured vehicles, acting with high temperature and a shock wave.

Technical Data

Calibre (mm)	40
Round mass (g)	210
Grenade mass (g)	160
Epicenter temperature (°C)	1500
Overpressure at 1 m distance (bars)	1
Open zone of destruction (m ²)	2
Closed zone of destruction (m ³)	4
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: M203, M79, HK69A1, F2000 or other similar weapons



**ROUND 40 mm
HE M03**

Technical Data

Calibre (mm)	40
Round mass (g)	225
Explosive mass (g)	48
Round length (mm)	106
Muzzle velocity (m/s)	78
Max range (m)	400
Lethal radius (m)	6
Operating temperature (°C)	-30 ÷ +50

The round 40 mm HE M03 is intended for firing from 40 mm underbarrel grenade launcher GP-25 and GP-30.

It is used against humans and technical and material means.

WEAPON COMPATIBILITY: under barrel grenade launchers 40 mm GP-25 and GP-30, BGP-40

ROUND 40 mm HE-SD M06 P1



NEW

The round 40 mm HE-SD M06 P1 (with fragmentation effect) is used against ground targets, mainly against sheltered and unsheltered troops.

The ammunition is intended for firing from 40 mm underbarrel grenade launcher GP-25 KASTYOR and GP-30.

Technical Data

Calibre (mm)	40
Round mass (g)	240
Round length (mm)	97
Muzzle velocity (m/s)	78
Max range (m)	400
Lethal radius (m)	> 6
Operating temperature (°C)	-42 ÷ +63

WEAPON COMPATIBILITY: under barrel grenade launchers 40 mm GP-25 and GP-30, BGP-40



Sloboda



ROUND 40 mm HE BOUNCING M12

Technical Data

Calibre (mm)	40
Round mass (g)	276
Explosive mass (g)	40
Round length (mm)	max 108.3
Muzzle velocity (m/s)	78
Fuze arming distance (m)	10 ÷ 40
Fuze self-destruct time (s)	12 ÷ 20
Max range (m)	400
Lethal radius (m)	6
Special characteristics (m)	jump height min 0.5
Operating temperature (°C)	-30 ÷ +50

NEW

The round 40 mm HE bouncing M12 is intended for firing from 40 mm underbarrel grenade launcher GP-25 and GP-30.

It is used against humans and technical and material means.

The function is obtained by bouncing and explosion in the air, which increase the efficiency of the shell fragments.

WEAPON COMPATIBILITY: under barrel grenade launchers 40 mm GP-25 and GP-30, BGP-40

ROUND 40 mm HEDP M04



The round 40 mm HEDP M04 is intended for firing from 40 mm underbarrel grenade launcher GP-25 and GP-30.

It is used against humans, light armored vehicles and technical and material means.

Technical Data

Calibre (mm)	40
Round mass (g)	230
Round length (mm)	max 102
Muzzle velocity (m/s)	78
Penetration (mm of steel plate)	60
Max range (m)	400
Lethal radius (m)	≥ 5
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: under barrel grenade launchers 40 mm GP-25 and GP-30, BGP-40



Ammunition 40 mm



**ROUND 40 mm
PRACTICE M03**

Technical Data

Calibre (mm)	40
Round mass (g)	230
Round length (mm)	106
Muzzle velocity (m/s)	78
Max range (m)	400
Precision on vertical target, at the distance of 100 m (m)	$V_p \leq 0.5$ $V_v \leq 0.5$
Operating temperature (°C)	-30 ÷ +50

The round 40 mm practice M03 is intended for personnel training for use of 40 mm underbarrel grenade launcher BGP as well as 40 mm underbarrel launcher KASTYOR type.

WEAPON COMPATIBILITY: under barrel grenade launchers 40 mm GP-25 and GP-30, BGP-40

ROUND 40 mm SMOKE M04



The round 40 mm smoke M04 is intended for firing from grenade launcher 40 mm GP-25, for creating of smoke screens and smoking of different terrains at distances up to 400 m.

Technical Data

Calibre (mm)	40
Round mass (g)	232
Round length (mm)	110
Delay time (s)	3 ÷ 6
Smoke time (s)	30
Muzzle velocity (m/s)	76
Firing range (m)	50 ÷ 400
Smoke type	white, red, green, yellow
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: under barrel grenade launchers 40 mm GP-25 and GP-30, BGP-40



Slobooda



**ROUND 40 mm
ILLUMINATING WITH
PARACHUTE M04**

Technical Data

Calibre (mm)	40
Round mass (g)	215
Round length (mm)	124
Delay time (s)	2.5 ÷ 3.5
Burning time of star (s)	20
Light intensity of star (cd)	80000
Middle wave length (nm)	587±5
Height fired at 85° (m)	182±30
Operating temperature (°C)	-30 ÷ +50

The round 40 mm illuminating with parachute M04 is intended for firing from grenade launcher 40 mm GP-25, for illuminating of terrain in night conditions and conditions of low visibility.

WEAPON COMPATIBILITY: under barrel grenade launchers 40 mm GP-25 and GP-30, BGP-40

ROUND 40 mm STUN&FLASH M12



NEW

The round 40 mm stun&flash M12 is intended for using by special forces of the Army and the police, for anti-terrorist actions, as well as for preventing and disabling any riots in the open or in closed spaces.

Technical Data

Calibre (mm)	40
Round mass (g)	max 250
Round length (mm)	max 134
Active substance (g)	60
Light intensity (1000000 cd)	15±5
Delay time (s)	min 3
Muzzle velocity (m/s)	76
Firing range (m)	min 100
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: under barrel grenade launchers 40 mm GP-25 and GP-30, BGP-40, GP-34



**RIFLE GRENADE
HE M99
WITH BULLET TRAP**

Technical Data

Calibre (mm)	30
Grenade mass (g)	550
Length (mm)	315
Muzzle velocity / 5.56 mm x 45 - SS 109 (m/s)	58
Muzzle velocity / 7.62 mm x 51 (m/s)	72
Max range / 5.56 mm x 45 - SS 109 (m)	300
Max range / 7.62 mm x 51 (m)	400
Operating temperature (°C)	-30 ÷ +50

The rifle grenade HE M99 with bullet trap is intended for the neutralization and destruction of enemy personnel and non-armoured fire means.

WEAPON COMPATIBILITY: semi-automatic rifles 7.62 mm, automatic rifles 5.56 mm and 7.62 mm or similar weapons with grenade attachment

RIFLE GRENADE TP M99 WITH BULLET TRAP



The rifle grenade TP M99 with bullet trap is intended for training of gunner in proper handling and firing.

Technical Data

Calibre (mm)	30
Grenade mass (g)	550
Length (mm)	315
Muzzle velocity / 5.56 mm x 45 - SS 109 (m/s)	58
Muzzle velocity / 7.62 mm x 51 (m/s)	72
Max range / 5.56 mm x 45 - SS 109 (m)	300
Max range / 7.62 mm x 51 (m)	400
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: semi-automatic rifles 7.62 mm, automatic rifles 5.56 mm and 7.62 mm or similar weapons with grenade attachment



Rifle grenades 30 mm



RIFLE GRENADE
HE M60 P1

Technical Data

Calibre (mm)	30
Grenade mass (g)	520
Length (mm)	307
Muzzle velocity / grenade cartridge 7.62 mm (m/s)	67
Max range / grenade cartridge 7.62 mm (m)	400
Accuracy at the distance of 200 m (m)	$H_{\max} - H_{\min} = 15$ Range in direction 3 m
Operating temperature (°C)	-30 ÷ +50

The rifle grenade HE M60 P1 without bullet trap is used for the neutralization and destruction of non-protected enemy personnel and fire means.

WEAPON COMPATIBILITY: semi-automatic rifles 7.62 mm, automatic rifles 5.56 mm and 7.62 mm or similar weapons with grenade attachment

RIFLE GRENADE HE M03 WITH BULLET TRAP



Technical Data

The rifle grenade HE M03 with bullet trap is intended for the neutralization and destruction of enemy personnel and non-armoured fire means.

Calibre (mm)	40
Grenade mass (g)	450
Length (mm)	275
Muzzle velocity / 5.56 mm x 45 - SS 109 (m/s)	58
Muzzle velocity / 7.62 mm x 51 (m/s)	72
Max range / 5.56 mm x 45 - SS 109 (m)	300
Max range / 7.62 mm x 51 (m)	400
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: semi-automatic rifles 7.62 mm, automatic rifles 5.56 mm and 7.62 mm or similar weapons with grenade attachment



Rifle grenades 40 mm



**RIFLE GRENADE
SMOKE M62**

Technical Data

Calibre (mm)	40
Grenade mass (g)	475
Length (mm)	330
Muzzle velocity / grenade cartridge 7.62 mm (m/s)	70
Max range / grenade cartridge 7.62 mm (m)	350
Delay time (s)	7.5
Smoke time (s)	80
Operating temperature (°C)	-30 ÷ +50

The rifle grenade smoke M62 is intended for smoke screening effects, blinding enemy and fire weapons, signaling, spotting of targets and camouflage of own troops.

WEAPON COMPATIBILITY: semi-automatic rifles 7.62 mm, automatic rifles 5.56 mm and 7.62 mm or similar weapons with grenade attachment

RIFLE GRENADE SMOKE M04 WITH BULLET TRAP



The rifle grenade smoke M04 with bullet trap is intended for smoke screening effects, blinding of the enemy, signaling, spotting of targets and camouflage of the own troops.

Technical Data

Calibre (mm)	40
Grenade mass (g)	580
Length (mm)	370
Muzzle velocity / 5.56 mm x 45 - SS 109 (m/s)	56
Muzzle velocity / 7.62 mm x 51 (m/s)	68
Max range / 5.56 mm x 45 - SS 109 (m)	250
Max range / 7.62 mm x 51 (m)	380
Delay time (s)	7.5
Smoke time (s)	80
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: semi-automatic rifles 7.62 mm, automatic rifles 5.56 mm and 7.62 mm or similar weapons with grenade attachment



Rifle grenades 40 mm



RIFLE GRENADE
ILLUMINATING M62

Technical Data

Calibre (mm)	40
Grenade mass (g)	400
Length (mm)	330
Range of parachute opening at firing at elevation of 45° (m)	250
Delay time (s)	4.3 ÷ 5.1
Operating temperature (°C)	-30 ÷ +50

The rifle grenade illuminating M62 is intended for illuminating of battle area for detection of enemy troops, spotting of targets, observing own firing results with another ammunition, correction of firing and disturbing of enemy.

WEAPON COMPATIBILITY: semi-automatic rifles 7.62 mm, automatic rifles 5.56 mm and 7.62 mm or similar weapons with grenade attachment

RIFLE GRENADE ILLUMINATING M08 WITH BULLET TRAP



The rifle grenade illuminating M08 with bullet trap is intended for illuminating of battle area for detection of enemy troops, spotting of targets, observing own firing results with another ammunition, correction of firing and disturbing of enemy.

Technical Data

Calibre (mm)	40
Grenade mass (g)	500
Length (mm)	370
Range of parachute opening at firing at elevation of 45° (m)	250
Delay time (s)	4.3 ÷ 5.1
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: semi-automatic rifles 7.62 mm, automatic rifles 5.56 mm and 7.62 mm or similar weapons with grenade attachment



RIFLE GRENADE
ANTITANK M60 P1

Technical Data

Calibre (mm)	60
Grenade mass (g)	610
Length (mm)	390
Muzzle velocity / grenade cartridge 7.62 mm (m/s)	61
Max range / grenade cartridge 7.62 mm (m)	330
Accuracy at the distance of 100 m (m)	H + L = 1.75
Penetration of homogeneous armour plate (mm)	200
Operating temperature (°C)	-30 ÷ +50

The rifle grenade antitank M60 P1 is intended for destroying tanks and armored vehicles, fortified military objects made of concrete, steel, wood and earth, and enemy personnel in shelters.

WEAPON COMPATIBILITY: semi-automatic rifles 7.62 mm, automatic rifles 5.56 mm and 7.62 mm or similar weapons with grenade attachment

HAND-HELD ROCKET LAUNCHER 64 mm RBR M80



Technical Data

Calibre (mm)	64
Type	HEAT
Carry length (mm)	860
Firing length (mm)	1200
Mass (kg)	3
Muzzle velocity (m/s)	187
Max range (m)	1280
Effective range (m)	200
Penetration of homogeneous armour plate (mm)	≥ 300
Operating temperature (°C)	-30 ÷ +50

The hand-held rocket launcher 64 mm RBR M80 is intended for action against light armoured transport vehicles, trucks and infantry fighting vehicles of different types.

It consists of launcher, rocket with shaped charge warhead and piezoelectric fuze.

The launcher is light weighted and intended for single-shot use.



Rocket weapon 90 mm



**HAND-HELD
ROCKET LAUNCHER
90 mm RBR M79A**

Technical Data

Calibre (mm)	90
Type	HEAT
Mass of container with rocket (kg)	5.2
Muzzle velocity (m/s)	245
Max range (m)	1960
Effective range (m)	350
Penetration of homogeneous armour plate (mm)	≥ 400
Operating temperature (°C)	-30 ÷ +40

The hand-held rocket launcher 90 mm RBR M79A is intended for action against armoured vehicles and fortified structures. It consists of launcher, rocket with shaped charge warhead and piezoelectric fuze. Launcher is intended for multiple-shot use and equipped with triggering mechanism and optical sight device.

HAND-HELD ROCKET LAUNCHER 120 mm RBR M91



Technical Data

Calibre (mm)	120
Type	HEAT
Mass of launcher with rocket (kg)	13
Muzzle velocity (m/s)	205
Max range (m)	1960
Effective range (m)	250
Penetration of homogeneous armour plate (mm)	≥ 700
Operating temperature (°C)	-30 ÷ +45

The hand-held rocket launcher 120 mm RBR M91 is intended for action modern tanks and armored targets of fortified structures and infantry fighting vehicles of different types.

It consists of launcher, rocket with shaped charge warhead and piezoelectric fuze.

The rocket is transported in the launcher, so the transition from marching to combat position is simple and quick.



Rockets 57 mm



ILLUMINATING
ROCKET
57 mm M17

Technical Data

NEW

Calibre (mm)	57
Mass (kg)	3.9
Lenght (mm)	1064
Muzzle velocity (m/s)	450
Propellant mass (kg)	0.97
Rocket engine operation time (s)	1.5
Functioning time of delay element (s)	25±2
Luminous intensity (cd)	300000
Burning time of flare (s)	min 70
Max range (m)	5500±500
Ignition	electrical
Operating temperature (°C)	0 ÷ +50

The illuminating rocket 57 mm M17 is designed and manufactured to be fired from both 57 mm straight and helical rocket launchers made by Bofors AB (Sweden).

In composition of rocket are parachute and flare section, time delay unit and rocket motor.

The rocket is designed to illuminate the field in case of combat operations, surveillance and identification of vessels during the coastal patrol.

WEAPON COMPATIBILITY: Bofors 57 mm L/70

FLAT EXPLOSIVE ELEMENT EE1-R333S




NEW

The flat explosive element EE1-R333S acts as additional protection for the flank of the tank turret.

It was designed to protect the tank from rocket (shaped charge) projectiles with a penetration capacity up to 300 mm.

Technical Data

Overall dimensions (mm)	250 x 130 x 13
Mass (kg)	1.85
Explosive type	PBX
Operating temperature (°C)	+30 ÷ +50

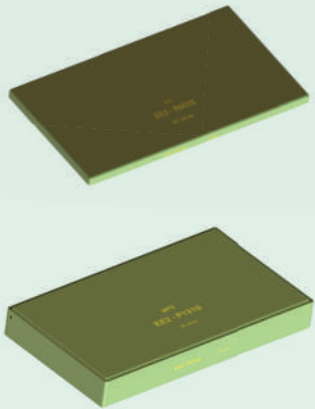

FLAT EXPLOSIVE
ELEMENT EE2-R662S
AND
PROFILED EXPLOSIVE
ELEMENT EE2-P131S

Technical Data

NEW

Flat explosive element EE2-R662S	Overall dimensions (mm)	371 x 206 x 15
	Mass (kg)	7.3
	Explosive type	PBX
	Operating temperature (°C)	+30 ÷ +50
Profiled explosive element EE2-P131S	Overall dimensions (mm)	371 x 206 x 48
	Mass (kg)	8.1
	Explosive type	PBX
	Operating temperature (°C)	+30 ÷ +50

The flat explosive element EE2-R662S and the profiled explosive element EE2-P131S act as additional protection for the frontal part of the tank turret and the frontal part of the tank body.

The explosive elements are designed to protect the tank from rocket (shaped charge) projectiles with a penetration capacity up to 950 mm and tank (shaped charge and sabot) ammunition with a penetration capacity up to 550 mm.

EBT 120 mm M18


NEW

The EBT 120 mm M18 is the HE projectile for destruction of different targets on the ground.

It consists of body with high explosive, stabilizer and special fuze UT M18.

Technical Data

Calibre (mm)	120
Type	HE SHELL
Mass (kg)	13
Length with fuze (mm)	675
Muzzle velocity (m/s)	320
Max range (m)	5500±500
Operating temperature (°C)	-30 ÷ +50



Warheads 130 mm



HE FRAGMENTATION
WARHEAD
130 mm M1

Technical Data

NEW

Calibre (mm)		130
Length (mm)		230
Mass (kg)		8.65
Explosive mass (kg)		1.8
Effective range (m)		min 14
Maximum fragmentation range (m)		300
Safety-arming mechanism M17SP	Dimension (mm)	Ø55 × 61
	Self-destruction	outside command
	Arming	power from the aircraft and 4 levels of safety
	Reliable action time	5 hours after launch and after arming
	Power consumption (W)	< 5

The HE fragmentation warhead 130 mm M1 is an explosive lethal device primarily intended for effective action against enemy targets.

It is used as an explosive device for equipping an unmanned aircraft.

This lethal device consists of assembly of warhead with fragmentation envelope made of steel balls of a diameter of 6 mm and safety-arming mechanism M17SP (SAM) with related electronics.

UNIVERSAL FUZE FOR MORTAR SHELLS UT M18



NEW

The universal fuze for mortar shells UT M18 is designed to fire HE mortar ammunition thrown out from the carrier installed on the aircraft (throwing out from the height).

The fuze is mechanical with safety and arming device.

The special fuze ensures the superquick (SQ) function for destroying the target with fragmentation effect.

The function of special fuze is to ensure the safe, secure and reliable action of standard mortar shell of calibers 60 mm, 81/82 mm and 120 mm.

Also, the special fuze provides the mechanical interfaces with the mortar shell and the carrier (container) on the aircraft.

Technical Data

Type	point detonating, mechanical
Fuze mass (kg)	0.224
Fuze overall dimension (mm)	Ø49 x 92.3
Overall dimension (without booster)	Ø49 x 70
Adapter of connecting thread on fuze for shell 60 mm M62P8	M38 x 2 6H
Adapter of connecting thread on fuze for shell 120 mm M62P8	M43 x 2 6H
Storage temperature (°C)	-30 ÷ +70
Operating temperature (°C)	-10 ÷ +55



Sloboda



TRIP FLARE 26.5 mm

Technical Data

Calibre (mm)	26.5
Mass of patrone (g)	58
Patrone length (mm)	78
Flare burning time (s)	15
Sound intensity (dB)	115
Light intensity (cd)	10000
Delay time (s)	0.6 ÷ 1.2
Middle wave length (nm)	589±5
Hight of the rising of sound signal (m)	10
Operating temperature (°C)	-35 ÷ +63

The trip flare 26.5 mm is designated for security and surveillance of parts of an area, posts, dams and various facilities during day and night.

SIGNAL CARTRIDGE

26.5 mm

ABC / LP 57



The signal cartridge 26.5 mm ABC / LP 57 is designated for giving light and sound signal.

Technical Data

Calibre (mm)	26.5
Cartridge mass (g)	115
Cartridge length (mm)	170
Flare burning time (s)	4.5 ÷ 7.5
Flare type	white-red-white
Pipe duration (s)	4.5 ÷ 7.5
Sound intensity (dB)	115
Flare range height (m)	175 ÷ 225
Light intensity (cd)	10000
Operating temperature (°C)	-35 ÷ +63

WEAPON COMPATIBILITY: 26 mm
signal pistol



Sloboda



**SIGNAL CARTRIDGE
26.5 mm WITH
PARACHUTE / LP 57**

Technical Data

Calibre (mm)	26.5
Cartridge mass (g)	115
Cartridge length (mm)	155
Flare burning time (s)	15
Flare range height (m)	70 ÷ 100
Light intensity (cd)	20000
Color saturation (%)	> 78
Middle wave length (nm)	589±3
Operating temperature (°C)	-35 ÷ +63

The signal cartridge 26.5 mm with parachute / LP 57 is designated for illuminating of terrain in night conditions and conditions of low visibility.

WEAPON COMPATIBILITY: 26 mm signal pistol

SIGNAL CARTRIDGE 26.5 mm WHITE / LP 57



The signal cartridge 26.5 mm white / LP 57 is designated for giving light signals.

Technical Data

Calibre (mm)	26.5
Cartridge mass (g)	60
Cartridge length (mm)	80
Flare burning time (s)	6.5 ÷ 9.5
Flare range height (m)	100 ÷ 140
Light intensity (cd)	20000
Color saturation (%)	< 58
Middle wave length (nm)	580±3
Operating temperature (°C)	-35 ÷ +63

WEAPON COMPATIBILITY: 26 mm
signal pistol



SIGNAL CARTRIDGE
26.5 mm
RED / LP 57

Technical Data

Calibre (mm)	26.5
Cartridge mass (g)	60
Cartridge length (mm)	80
Flare burning time (s)	6.5 ÷ 9.5
Flare range height (m)	100 ÷ 140
Light intensity (cd)	20000
Color saturation (%)	> 70
Middle wave length (nm)	609±3
Operating temperature (°C)	-35 ÷ +63

The signal cartridge 26.5 mm red / LP 57 is designated for giving light signals.

WEAPON COMPATIBILITY: 26 mm signal pistol

SIGNAL CARTRIDGE 26.5 mm GREEN / LP 57



The signal cartridge 26.5 mm green / LP 57 is designated for giving light signals.

Technical Data

Calibre (mm)	26.5
Cartridge mass (g)	60
Cartridge length (mm)	80
Flare burning time (s)	6.5 ÷ 9.5
Flare range height (m)	100 ÷ 140
Light intensity (cd)	10000
Color saturation (%)	> 57
Middle wave length (nm)	554±3
Operating temperature (°C)	-35 ÷ +63

WEAPON COMPATIBILITY: 26 mm
signal pistol



SIGNAL CARTRIDGE
26.5 mm SMOKE
VIOLET / LP 57

Technical Data

Calibre (mm)	26.5
Cartridge mass (g)	55
Cartridge length (mm)	80
Smoke time, from trajectory vertex to falling on land (s)	≈ 10
Flare range height (m)	100 ÷ 140
Operating temperature (°C)	-35 ÷ +63

The signal cartridge 26.5 mm smoke violet / LP 57 is designated for giving smoke signals.

WEAPON COMPATIBILITY: 26 mm signal pistol

CARTRIDGE 38 mm WITH RUBBER BALLS P1



The cartridge 38 mm with rubber balls P1 is to be used for anti-riot control.

Technical Data

Calibre (mm)	38
Cartridge mass (g)	120
Cartridge length (mm)	122.5
Number of balls	24
Ball diameter (mm)	15
Operating temperature (°C)	-42 ÷ +63

WEAPON COMPATIBILITY: 38 mm signal pistol, 38 mm multi-purpose gun or other similar weapons



Sloboda

Ammunition 38 mm



**CARTRIDGE 38 mm
WITH SINGLE BATON
RUBBER P1**

Technical Data

Calibre (mm)	38
Cartridge mass (g)	186
Cartridge length (mm)	122.5
Projectile length (mm)	98
Max range (m)	120±20
Operating temperature (°C)	-42 ÷ +63

The cartridge 38 mm with single baton rubber P1 is to be used for anti-riot control.

WEAPON COMPATIBILITY: 38 mm signal pistol, 38 mm multi-purpose gun or other similar weapons

CARTRIDGE 38 mm WITH THREE PART BATON RUBBER P1



The cartridge 38 mm with three part baton rubber P1 is to be used for anti-riot control.

Technical Data

Calibre (mm)	38
Cartridge mass (g)	186
Projectile mass (g)	43
Cartridge length (mm)	122.5
Projectile length (mm)	98
Max range (m)	100±20
Operating temperature (°C)	-42 ÷ +63

WEAPON COMPATIBILITY: 38 mm signal pistol, 38 mm multi-purpose gun or other similar weapons



Sloboda



**CARTRIDGE 38 mm
SIGNAL
(RED, WHITE, GREEN)**

Technical Data

NEW

Calibre (mm)	38
Cartridge mass (g)	100
Cartridge length (mm)	70
Flare burning time (s)	6
Flare range height (m)	80
Light intensity (cd)	40000
Operating temperature (°C)	-30 ÷ +50

The cartridge 38 mm signal (red, white, green) is designated for giving light signals.

WEAPON COMPATIBILITY: 38 mm signal pistol, 38 mm multi-purpose gun or other similar weapons

CARTRIDGE 38 mm SMOKE



NEW

The cartridge 38 mm smoke is intended for creating of smoke screens and smoking of different terrains.

Technical Data

Calibre (mm)	38
Cartridge mass (g)	190
Cartridge length (mm)	122.5
Delay time (s)	1 ÷ 3
Smoke time (s)	min 45
Firing range (m)	100
Smoke type	white
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 38 mm signal pistol, 38 mm multi-purpose gun or other similar weapons



**CARTRIDGE 38 mm
SMOKE CS**

Technical Data

NEW

Calibre (mm)	38
Cartridge mass (g)	180
Cartridge length (mm)	122.5
Delay time (s)	1 ÷ 3
Smoke time (s)	min 20
Firing range (m)	100
Smoke type	CS
Operating temperature (°C)	-30 ÷ +50

The cartridge 38 mm smoke CS is used by special forces of the Army and the police, for anti-terrorist actions, as well as for preventing and disabling any riots.

WEAPON COMPATIBILITY: 38 mm signal pistol, 38 mm multi-purpose gun or other similar weapons

GRENAD HAND STUN&FLASH THREE PART M13 (40 mm)


NEW

The grenade hand stun&flash three part M13 (40 mm) is designated for temporary disabling in enclosed and open areas.

It is used by the special military and police forces, for anti-terroristic actions and riot controls and prevention of any type of disorder.

Technical Data

Calibre (mm)	40
Mass (g)	415
Length (mm)	164
Delay time (s)	2.5 ÷ 5
Sound intensity (dB)	120
Flash bang part	three part
Operating temperature (°C)	-30 ÷ +50



Hand grenades 40 mm



**GRENADE HAND
SMOKE
THREE PART CS**

Technical Data

NEW

Calibre (mm)	40
Mass (g)	265
Length (mm)	170
Delay time (s)	2 ÷ 5
Smoke time (s)	20
Smoke part CS	3
Operating temperature (°C)	-30 ÷ +50

The grenade hand smoke three part CS is used by special forces of the Army and the police, for anti-terrorist actions, as well as for preventing and disabling any riots.

GRENADE HAND STUN&FLASH (45 mm)



NEW

The grenade hand stun&flash (45 mm) is designated for temporary disabling in enclosed and open areas.

It is used by the special military and police forces, for anti-terroristic actions and riot controls and prevention of any type of disorder.

Technical Data

Calibre (mm)	45
Mass (g)	145
Length (mm)	138
Delay time (s)	2.5 ÷ 5
Sound intensity (dB)	120
Operating temperature (°C)	-42 ÷ +63


Hand grenades 45 mm

**GRENADE HAND
SMOKE (45 mm)**
Technical Data

Calibre (mm)	45
Mass (g)	250
Length (mm)	136
Delay time (s)	2.5 ÷ 5
Smoke time (s)	60
Smoke type	white, red, green, blue, yellow, orange
Operating temperature (°C)	-30 ÷ +50

The grenade hand smoke (45 mm) is designated to create the smoke screens and to distribute smoke on the various terrains.

GRENADE HAND SMOKE (53 mm)



NEW

The grenade hand smoke (53 mm) is designated to create the smoke screens, to distribute smoke on the various terrains and for signaling.

Technical Data

Calibre (mm)	53
Mass (g)	450
Length (mm)	165
Delay time (s)	3.5 ÷ 5.5
Smoke time (s)	min 50
Smoke type	white, red, green, blue, yellow, orange
Operating temperature (°C)	-35 ÷ +63



Smoke grenades 81 mm


**81 mm SMOKE
GRENADE GD2**
Technical Data

Calibre (mm)	81
Grenade mass (g)	2340
Length (mm)	217
Delay time (s)	9.5±2.5
Smoke time (s)	100
Smoke height (m)	3 ÷ 10
Smoke diameter (m)	10 ÷ 30
Range (m)	250
Operating temperature (°C)	-30 ÷ +50

The 81 mm smoke grenade GD2 is designed to create smoke screens.

It is fired from the 81 mm smoke grenade launcher.

GRENADE 82 mm SMOKE POT M79



NEW

The grenade 82 mm smoke pot M79 is intended for creating smoke curtains.

It is designed for firing from the 82 mm smoke box launchers and it can also be activated manually with mechanical fuze.

Technical Data

Calibre (mm)	82
Grenade mass (g)	1500
Length (mm)	150
Delay time (s)	2.6±0.4
Smoke time (s)	150 ÷ 300
Smoke height (m)	3 ÷ 10
Smoke diameter (m)	10 ÷ 20
Range (m)	min 100
Operating temperature (°C)	-30 ÷ +50

Ammunition 20 mm x 102



Sloboda



**ROUND 20 mm x 102
HE/HEI**

Technical Data

Calibre (mm)	20
Muzzle velocity (m/s)	1030±15
Maximum pressure of powder gases (MPa)	430
Fuze arming distance (m)	183±23
Round mass (g)	259
Projectile mass (g)	100±1.7
Operating temperature (°C)	-30 ÷ +50

The 20 mm x 102 HE/HEI Round consists of a brass cartridge case with an electrical gun primer, propellant charge and a high-explosive projectile.

The HE projectile is loaded with explosive composition and fitted with point-detonating fuze.

Projectile designated as HEI is loaded with explosive-incendiary composition.

WEAPON COMPATIBILITY: guns M621, M61A, M39 and M197

ROUND 20 mm x 102 AP



NEW

The 20 mm x 102 AP Round consists of a brass cartridge case with an electrical gun primer, propellant charge and an armour-piercing projectile.

Technical Data

Calibre (mm)	20
Muzzle velocity (m/s)	1000±15
Maximum pressure of powder gases (MPa)	430
Round mass (g)	265
Projectile mass (g)	102.5±1.7
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: guns M621, M61A, M39 and M197



Sloboda



ROUND 20 mm x 102 AP-T

Technical Data

Calibre (mm)	20
Muzzle velocity (m/s)	1000±15
Maximum pressure of powder gases (MPa)	430
Round mass (g)	270
Projectile mass (g)	108±1.7
Tracer burning time (s)	min 3.2
Operating temperature (°C)	-30 ÷ +50

The 20 mm x 102 AP-T Round consists of a brass cartridge case with an electrical gun primer, propellant charge and an armour-piercing tracer projectile.

The AP-T projectile is filled with tracer composition.

WEAPON COMPATIBILITY: guns M621, M61A, M39 and M197

ROUND 20 mm x 102 TP



NEW

The 20 mm x 102 TP Round consists of a brass cartridge case with an electrical gun primer, propellant charge and a target practice projectile.

Technical Data

Calibre (mm)	20
Muzzle velocity (m/s)	1030±15
Maximum pressure of powder gases (MPa)	430
Round mass (g)	259
Projectile mass (g)	100±1.7
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: guns M621, M61A, M39 and M197

Ammunition 20 mm x 110 Hispano



Sloboda



**ROUND 20 mm x 110
HE/HEI**

Technical Data

Calibre (mm)	20
Muzzle velocity (m/s)	850±10
Maximum pressure of powder gases (MPa)	304.1
Fuze arming distance (m)	150
Fuze self-destruction time (s)	4.5 ÷ 8
Round mass (g)	257±6
Projectile mass (g)	130±2
Operating temperature (°C)	-30 ÷ +50

The 20 mm x 110 HE/HEI Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a high-explosive projectile.

The HE projectile is loaded with explosive composition and fitted with point-detonating fuze with mechanical self-destruction.

Projectile designated as HEI is loaded with explosive-incendiary composition.

WEAPON COMPATIBILITY: anti-aircraft guns 20 mm M55, HS 404 Hispano and HS 804 Hispano

ROUND 20 mm x 110 HE-T/HEI-T



The 20 mm x 110 HE-T/HEI-T Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a high-explosive tracer projectile.

The HE-T projectile is loaded with explosive and tracer composition and fitted with point-detonating fuze with mechanical self-destruction.

Projectile designated as HEI-T is loaded with explosive-incendiary and tracer composition.

Technical Data

Calibre (mm)	20
Muzzle velocity (m/s)	850±10
Maximum pressure of powder gases (MPa)	304.1
Fuze arming distance (m)	150
Fuze self-destruction time (s)	4.5 ÷ 8
Tracer burning time (s)	min 3.2
Round mass (g)	261±6
Projectile mass (g)	135±2
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: antiaircraft guns 20 mm M55, HS 404 Hispano and HS 804 Hispano



Sloboda



ROUND 20 mm x 110 AP-T

Technical Data

Calibre (mm)	20
Muzzle velocity (m/s)	840±10
Maximum pressure of powder gases (MPa)	304.1
Round mass (g)	273±6
Projectile mass (g)	142±2.5
Tracer burning time (s)	min 3.2
Operating temperature (°C)	-30 ÷ +50

The 20 mm x 110 AP-T Round consists of a brass cartridge case with a percussion gun primer, propellant charge and an armour-piercing tracer projectile.

The AP-T projectile is filled with tracer composition.

WEAPON COMPATIBILITY: antiaircraft guns 20 mm M55, HS 404 Hispano and HS 804 Hispano

ROUND 20 mm x 110 API



NEW

The 20 mm x 110 API Round consists of a brass cartridge case with a percussion gun primer, propellant charge and an armour-piercing incendiary projectile.

The API projectile is filled with incendiary composition.

Technical Data

Calibre (mm)	20
Muzzle velocity (m/s)	840±10
Maximum pressure of powder gases (MPa)	304.1
Round mass (g)	273±6
Projectile mass (g)	142±2.5
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: antiaircraft guns 20 mm M55, HS 404 Hispano and HS 804 Hispano



Sloboda



ROUND 20 mm x 110 API-T

Technical Data

NEW

Calibre (mm)	20
Muzzle velocity (m/s)	840±10
Maximum pressure of powder gases (MPa)	304.1
Round mass (g)	273±6
Projectile mass (g)	142±2.5
Tracer burning time (s)	min 2
Operating temperature (°C)	-30 ÷ +50

The 20 mm x 110 API-T Round consists of a brass cartridge case with a percussion gun primer, propellant charge and an armour-piercing incendiary tracer projectile.

The API-T projectile is filled with incendiary and tracer compositions.

WEAPON COMPATIBILITY: anti-aircraft guns 20 mm M55, HS 404 Hispano and HS 804 Hispano

ROUND 20 mm x 110 TP



NEW

The 20 mm x 110 TP Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a target practice projectile.

Technical Data

Calibre (mm)	20
Muzzle velocity (m/s)	850±10
Maximum pressure of powder gases (MPa)	304.1
Round mass (g)	257±6
Projectile mass (g)	130±2
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: antiaircraft guns 20 mm M55, HS 404 Hispano and HS 804 Hispano



Sloboda



ROUND 20 mm x 110 TP-T

Technical Data

Calibre (mm)	20
Muzzle velocity (m/s)	850±10
Maximum pressure of powder gases (MPa)	304.1
Round mass (g)	261±6
Projectile mass (g)	137±2
Tracer burning time (s)	min 3.2
Operating temperature (°C)	-30 ÷ +50

The 20 mm x 110 TP-T Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a target practice tracer projectile.

The TP-T projectile is filled with tracer composition.

WEAPON COMPATIBILITY: antiaircraft guns 20 mm M55, HS 404 Hispano and HS 804 Hispano

ROUND 20 mm x 110 TP



NEW

The 20 mm x 110 TP Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a training projectile.

This type of TP projectile is loaded with flash composition and fitted with point-detonating fuze with mechanical self-destruction.

Technical Data

Calibre (mm)	20
Muzzle velocity (m/s)	850±10
Maximum pressure of powder gases (MPa)	303
Fuze arming distance (m)	150
Fuze self-destruction time (s)	min 12
Round mass (g)	257
Projectile mass (g)	127±2
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 20 mm subcaliber training barrels M78 and M79 fitted to larger weapons



Sloboda

Ammunition 20 mm x 110 Subcaliber barrels



**ROUND 20 mm x 110
TP-T**

Technical Data

NEW

Calibre (mm)	20
Muzzle velocity (m/s)	850±10
Maximum pressure of powder gases (MPa)	303
Fuze arming distance (m)	150
Fuze self-destruction time (s)	4.5 ÷ 8
Round mass (g)	259
Projectile mass (g)	134.3±2
Operating temperature (°C)	-30 ÷ +50

The 20 mm x 110 TP-T Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a training tracer projectile.

This type of TP-T projectile is loaded with flash and tracer composition and fitted with point-detonating fuze with mechanical self-destruction.

WEAPON COMPATIBILITY: 20 mm subcaliber training barrels M78 and M79 fitted to larger weapons

ROUND 20 mm x 110RB HE/HEI



The 20 mm x 110RB HE/HEI Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a high-explosive projectile.

The HE projectile is loaded with explosive composition and fitted with point-detonating fuze with mechanical self-destruction.

Projectile designated as HEI is loaded with explosive-incendiary composition.

Technical Data

Calibre (mm)	20
Muzzle velocity (m/s)	845±10
Maximum pressure of powder gases (MPa)	328.6
Fuze arming distance (m)	200
Fuze self-destruction time (s)	4.5 ÷ 9.5
Round mass (g)	243±6
Projectile mass (g)	119±2
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: antiaircraft gun 20 mm MK-IV Oerlikon.

Ammunition 20 mm x 110RB



Sloboda



ROUND
20 mm x 110RB
HE-T/HEI-T

Technical Data

Calibre (mm)	20
Muzzle velocity (m/s)	845±10
Maximum pressure of powder gases (MPa)	328.6
Fuze arming distance (m)	200
Fuze self-destruction time (s)	4.5 ÷ 9.5
Tracer burning time (s)	min 3.5
Round mass (g)	246±6
Projectile mass (g)	122±2
Operating temperature (°C)	-30 ÷ +50

The 20 mm x 110RB HE-T/HEI-T Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a high-explosive tracer projectile.

The HE-T projectile is loaded with explosive and tracer composition and fitted with point-detonating fuze with mechanical self-destruction.

Projectile designated as HEI-T is loaded with explosive-incendiary and tracer composition.

WEAPON COMPATIBILITY: antiaircraft gun 20 mm MK-IV Oerlikon

ROUND 20 mm x 110RB AP-T



The 20 mm x 110RB AP-T Round consists of a brass cartridge case with a percussion gun primer, propellant charge and an armour-piercing tracer projectile.

The AP-T projectile is filled with tracer composition.

Technical Data

Calibre (mm)	20
Muzzle velocity (m/s)	800±15
Maximum pressure of powder gases (MPa)	386
Round mass (g)	265±8
Projectile mass (g)	142±2
Tracer burning time (s)	min 3.5
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: antiaircraft gun 20 mm MK-IV Oerlikon.

Ammunition 20 mm x 110RB



Sloboda



ROUND
20 mm x 110RB
API

Technical Data

Calibre (mm)	20
Muzzle velocity (m/s)	800±15
Maximum pressure of powder gases (MPa)	386
Round mass (g)	265±8
Projectile mass (g)	142±2
Operating temperature (°C)	-30 ÷ +50

The 20 mm x 110RB API Round consists of a brass cartridge case with a percussion gun primer, propellant charge and an armour-piercing incendiary projectile.

The API projectile is filled with incendiary composition.

WEAPON COMPATIBILITY: antiaircraft gun 20 mm MK-IV Oerlikon

ROUND **20 mm x 110RB** **TP**


NEW

The 20 mm x 110RB TP Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a target practice projectile.

Technical Data

Calibre (mm)	20
Muzzle velocity (m/s)	845±10
Maximum pressure of powder gases (MPa)	328.6
Round mass (g)	243±6
Projectile mass (g)	119±2
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: antiaircraft gun 20 mm MK-IV Oerlikon



Sloboda



ROUND
20 mm x 110RB
TP-T

Technical Data

Calibre (mm)	20
Muzzle velocity (m/s)	845±10
Maximum pressure of powder gases (MPa)	328.6
Round mass (g)	246±6
Projectile mass (g)	122±2.5
Tracer burning time (s)	min 3.5
Operating temperature (°C)	-30 ÷ +50

The 20 mm x 110RB TP-T Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a target practice tracer projectile.

The TP-T projectile is filled with tracer composition.

WEAPON COMPATIBILITY: antiaircraft gun 20 mm MK-IV Oerlikon

ROUND 23 mm x 115 HE/HEI



The 23 mm x 115 HE/HEI Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a high-explosive projectile.

The HE projectile is loaded with explosive composition and fitted with point-detonating fuze.

Projectile designated as HEI is loaded with explosive-incendiary composition.

Technical Data

Calibre (mm)	23
Muzzle velocity (m/s)	720±10
Maximum pressure of powder gases (MPa)	300
Fuze arming distance (m)	100
Round mass (g)	329±8
Projectile mass (g)	174±3.5
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: aircraft guns 23 mm GSh-23L, GSh-23LU and GSh-6-23

Ammunition 23 mm x 115



Sloboda



**ROUND 23 mm x 115
HE-T/HEI-T**

Technical Data

Calibre (mm)	23
Muzzle velocity (m/s)	720±10
Maximum pressure of powder gases (MPa)	300
Fuze arming distance (m)	100
Tracer burning time (s)	min 3.6
Round mass (g)	329±8
Projectile mass (g)	174±3.5
Operating temperature (°C)	-30 ÷ +50

The 23 mm x 115 HE-T/HEI-T Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a high-explosive tracer projectile.

The HE-T projectile is loaded with explosive and tracer composition and fitted with point-detonating fuze.

Projectile designated as HEI-T is loaded with explosive-incendiary and tracer composition.

WEAPON COMPATIBILITY: aircraft guns 23 mm GSh-23L, GSh-23LU and GSh-6-23

ROUND 23 mm x 115 API



Technical Data

The 23 mm x 115 API Round consists of a brass cartridge case with a percussion gun primer, propellant charge and an armour-piercing incendiary projectile.

The API projectile is filled with incendiary composition.

Calibre (mm)	23
Muzzle velocity (m/s)	720±10
Maximum pressure of powder gases (MPa)	300
Round mass (g)	331±8
Projectile mass (g)	176.5±4
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: aircraft guns 23 mm GSh-23L, GSh-23LU and GSh-6-23



ROUND 23 mm x 115
API-T

Technical Data

NEW

Calibre (mm)	23
Muzzle velocity (m/s)	720±10
Maximum pressure of powder gases (MPa)	300
Round mass (g)	321±8
Projectile mass (g)	168±4
Tracer burning time (s)	min 3
Operating temperature (°C)	-30 ÷ +50

The 23 mm x 115 API-T Round consists of a brass cartridge case with a percussion gun primer, propellant charge and an armour-piercing incendiary tracer projectile.

The API-T projectile is filled with incendiary and tracer composition.

WEAPON COMPATIBILITY: aircraft guns 23 mm GSh-23L, GSh-23LU and GSh-6-23

ROUND 23 mm x 115 TP



NEW

The 23 mm x 115 TP Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a target practice projectile.

Technical Data

Calibre (mm)	23
Muzzle velocity (m/s)	720±10
Maximum pressure of powder gases (MPa)	300
Round mass (g)	329±8
Projectile mass (g)	174±3.5
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: aircraft guns
23 mm GSh-23L, GSh-23LU and GSh-6-23



Sloboda



ROUND 23 mm x 115 TP-T

Technical Data

NEW

Calibre (mm)	23
Muzzle velocity (m/s)	720±10
Maximum pressure of powder gases (MPa)	300
Round mass (g)	329±8
Projectile mass (g)	174±3.5
Tracer burning time (s)	min 3
Operating temperature (°C)	-30 ÷ +50

The 23 mm x 115 TP-T Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a target practice tracer projectile.

The TP-T projectile is filled with tracer composition.

WEAPON COMPATIBILITY: aircraft guns 23 mm GSh-23L, GSh-23LU and GSh-6-23

ROUND 23 mm x 152B HE/HEI



The 23 mm x 152B HE/HEI Round consists of a steel cartridge case with a percussion gun primer, propellant charge and a high-explosive projectile.

The HE projectile is loaded with explosive composition and fitted with point-detonating fuze with mechanical self-destruction.

Projectile designated as HEI is loaded with explosive-incendiary composition.

Technical Data

Calibre (mm)	23
Muzzle velocity (m/s)	970±10
Maximum pressure of powder gases (MPa)	300
Fuze arming distance (m)	100
Fuze self-destruction time (s)	5.6 ÷ 11.2
Round mass (g)	441±8
Projectile mass (g)	182±3
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: antiaircraft guns 23 mm ZU-23-2 and ZSU-23-4



Sloboda



ROUND 23 mm x 152B HE-T/HEI-T

Technical Data

NEW

Calibre (mm)	23
Muzzle velocity (m/s)	970±10
Maximum pressure of powder gases (MPa)	300
Fuze arming distance (m)	100
Fuze self-destruction time (s)	5.6 ÷ 11.2
Tracer burning time (s)	min 3.5
Round mass (g)	449±8
Projectile mass (g)	191±3
Operating temperature (°C)	-30 ÷ +50

The 23 mm x 152B HE-T/HEI-T Round consists of a steel cartridge case with a percussion gun primer, propellant charge and a high-explosive tracer projectile.

The HE-T projectile is loaded with explosive and tracer composition and fitted with point-detonating fuze with mechanical self-destruction.

Projectile designated as HEI-T is loaded with explosive-incendiary and tracer composition.

WEAPON COMPATIBILITY: antiaircraft guns 23 mm ZU-23-2 and ZSU-23-4

ROUND 23 mm x 152B API



NEW

The 23 mm x 152B API Round consists of a steel cartridge case with a percussion gun primer, propellant charge and an armour-piercing incendiary projectile.

The API projectile is filled with incendiary composition.

Technical Data

Calibre (mm)	23
Muzzle velocity (m/s)	970±10
Maximum pressure of powder gases (MPa)	300
Round mass (g)	447±8
Projectile mass (g)	189±3
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: antiaircraft guns 23 mm ZU-23-2 and ZSU-23-4



Sloboda



ROUND 23 mm x 152B API-T

Technical Data

NEW

Calibre (mm)	23
Muzzle velocity (m/s)	970±10
Maximum pressure of powder gases (MPa)	300
Round mass (g)	447±8
Projectile mass (g)	189±3
Tracer burning time (s)	min 3.5
Operating temperature (°C)	-30 ÷ +50

The 23 mm x 152B API-T Round consists of a still cartridge case with a percussion gun primer, propellant charge and an armour-piercing incendiary tracer projectile.

The API-T projectile is filled with incendiary and tracer composition.

WEAPON COMPATIBILITY: anti-aircraft guns 23 mm ZU-23-2 and ZSU-23-4

ROUND 20 mm x 152B TP



NEW

The 23 mm x 152B TP Round consists of a steel cartridge case with a percussion gun primer, propellant charge and a target practice projectile.

Technical Data

Calibre (mm)	23
Muzzle velocity (m/s)	970±10
Maximum pressure of powder gases (MPa)	300
Round mass (g)	441±8
Projectile mass (g)	182±3
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: antiaircraft guns 23 mm ZU-23-2 and ZSU-23-4



Sloboda



ROUND 23 mm x 152B TP-T

Technical Data

Calibre (mm)	23
Muzzle velocity (m/s)	970±10
Maximum pressure of powder gases (MPa)	300
Round mass (g)	449±8
Projectile mass (g)	191±3
Tracer burning time (s)	min 3.5
Operating temperature (°C)	-30 ÷ +50

The 23 mm x 152B TP-T Round consists of a steel cartridge case with a percussion gun primer, propellant charge and a target practice tracer projectile.

The TP-T projectile is filled with tracer composition.

WEAPON COMPATIBILITY: antiaircraft guns 23 mm ZU-23-2 and ZSU-23-4

ROUND 30 mm x 165 HE/HEI



NEW

The 30 mm x 165 HE/HEI Round consists of a steel cartridge case with an electrical gun primer, propellant charge and a high-explosive projectile.

The HE projectile is loaded with explosive composition and fitted with point-detonating fuze, with delayed action and pyrotechnical self-destruction.

Projectile designated as HEI is loaded with explosive-incendiary composition.

Technical Data

Calibre (mm)	30
Muzzle velocity (m/s)	890±15
Maximum pressure of powder gases (MPa)	330
Fuze arming distance (m)	100
Fuze self-destruction time (s)	13 ÷ 19
Round mass (g)	833
Projectile mass (g)	389±6
Operating temperature (°C)	-40 ÷ +50

WEAPON COMPATIBILITY: antiaircraft gun AO-18 and naval gun AK-630M



Ammunition 30 mm x 165 for AK-630M...



**ROUND 30 mm x 165
HE-T/HEI-T**

Technical Data

Calibre (mm)	30
Muzzle velocity (m/s)	890±15
Maximum pressure of powder gases (MPa)	330
Fuze arming distance (m)	100
Fuze self-destruction time (s)	13 ÷ 19
Tracer burning time (s)	min 10
Round mass (g)	830
Projectile mass (g)	386±6
Operating temperature (°C)	-40 ÷ +50

The 30 mm x 165 HE-T/HEI-T Round consists of a steel cartridge case with an electrical gun primer, propellant charge and a high-explosive tracer projectile.

The HE-T projectile is loaded with explosive and tracer composition and fitted with point-detonating fuze, with delayed action and pyrotechnical self-destruction.

Projectile designated as HEI-T is loaded with explosive-incendiary and tracer composition.

WEAPON COMPATIBILITY: antiaircraft gun AO-18 and naval gun AK-630M

ROUND 30 mm x 165 AP



NEW

The 30 mm x 165 AP Round consists of a steel cartridge case with an electrical gun primer, propellant charge and an armour-piercing projectile.

Technical Data

Calibre (mm)	30
Muzzle velocity (m/s)	890±15
Maximum pressure of powder gases (MPa)	330
Round mass (g)	845
Projectile mass (g)	400±6
Operating temperature (°C)	-40 ÷ +50

WEAPON COMPATIBILITY: antiaircraft gun AO-18 and naval gun AK-630M



Sloboda

Ammunition 30 mm x 165 for AK-630M...



ROUND 30 mm x 165 AP-T

Technical Data

NEW

Calibre (mm)	30
Muzzle velocity (m/s)	890±15
Maximum pressure of powder gases (MPa)	330
Round mass (g)	845
Projectile mass (g)	400±6
Tracer burning time (s)	min 3.5
Operating temperature (°C)	-40 ÷ +50

The 30 mm x 165 AP-T Round consists of a steel cartridge case with an electrical gun primer, propellant charge and an armour-piercing tracer projectile.

The AP-T projectile is filled with tracer composition.

WEAPON COMPATIBILITY: anti-aircraft gun AO-18 and naval gun AK-630M

ROUND 30 mm x 165 TP



NEW

The 30 mm x 165 TP Round consists of a steel cartridge case with an electrical gun primer, propellant charge and a target practice projectile.

Technical Data

Calibre (mm)	30
Muzzle velocity (m/s)	890±15
Maximum pressure of powder gases (MPa)	330
Round mass (g)	833
Projectile mass (g)	389±6
Operating temperature (°C)	-40 ÷ +50

WEAPON COMPATIBILITY: antiaircraft gun AO-18 and naval gun AK-630M



Sloboda

Ammunition 30 mm x 165 for AK-630M...



ROUND 30 mm x 165 TP-T

Technical Data

NEW

Calibre (mm)	30
Muzzle velocity (m/s)	890±15
Maximum pressure of powder gases (MPa)	330
Round mass (g)	830
Projectile mass (g)	386±6
Tracer burning time (s)	min 3
Operating temperature (°C)	-40 ÷ +50

The 30 mm x 165 TP-T Round consists of a steel cartridge case with an electrical gun primer, propellant charge and a target practice tracer projectile.

The TP-T projectile is filled with tracer composition.

WEAPON COMPATIBILITY: anti-aircraft gun AO-18 and naval gun AK-630M

ROUND 30 mm x 165 HE/HEI



The 30 mm x 165 HE/HEI Round consists of a steel cartridge case with an electrical gun primer, propellant charge and a high-explosive projectile.

The HE projectile is loaded with explosive composition and fitted with point-detonating fuze, with delayed action.

Projectile designated as HEI is loaded with explosive-incendiary composition.

Technical Data

Calibre (mm)	30
Muzzle velocity (m/s)	860±15
Maximum pressure of powder gases (MPa)	325
Fuze arming distance (m)	150
Round mass (g)	833
Projectile mass (g)	389±6
Operating temperature (°C)	-40 ÷ +60

WEAPON COMPATIBILITY: aircraft guns 30 mm GSh-30, GSh-301 and GSh-30K



Sloboda



**ROUND 30 mm x 165
AP**

Technical Data

NEW

Calibre (mm)	30
Muzzle velocity (m/s)	860±15
Maximum pressure of powder gases (MPa)	325
Round mass (g)	845
Projectile mass (g)	400±6
Operating temperature (°C)	-40 ÷ +60

The 30 mm x 165 AP Round consists of a steel cartridge case with an electrical gun primer, propellant charge and an armour-piercing projectile.

WEAPON COMPATIBILITY: aircraft guns 30 mm GSh-30, GSh-301 and GSh-30K

ROUND 30 mm x 165 AP-T



Technical Data

The 30 mm x 165 AP-T Round consists of a steel cartridge case with an electrical gun primer, propellant charge and an armour-piercing tracer projectile.

The AP-T projectile is filled with tracer composition.

Calibre (mm)	30
Muzzle velocity (m/s)	860±15
Maximum pressure of powder gases (MPa)	325
Round mass (g)	845
Projectile mass (g)	400±6
Tracer burning time (s)	min 3.5
Operating temperature (°C)	-40 ÷ +60

WEAPON COMPATIBILITY: aircraft guns 30 mm GSh-30, GSh-301 and GSh-30K



Sloboda



ROUND 30 mm x 165 TP

Technical Data

NEW

Calibre (mm)	30
Muzzle velocity (m/s)	860±15
Maximum pressure of powder gases (MPa)	325
Round mass (g)	833
Projectile mass (g)	389±6
Operating temperature (°C)	-40 ÷ +60

The 30mm x 165 TP Round consists of a steel cartridge case with an electrical gun primer, propellant charge and a target practice projectile.

WEAPON COMPATIBILITY: aircraft guns 30 mm GSh-30, GSh-301 and GSh-30K

ROUND 30 mm x 165 HE/HEI



The 30 mm x 165 HE/HEI Round consists of a steel cartridge case with a percussion gun primer, propellant charge and a high-explosive projectile.

The HE projectile is loaded with explosive composition and fitted with point-detonating fuze, with delayed action and pyrotechnical self-destruction.

Projectile designated as HEI is loaded with explosive-incendiary composition.

Technical Data

Calibre (mm)	30
Muzzle velocity (m/s)	960±15
Maximum pressure of powder gases (MPa)	360
Fuze arming distance (m)	100
Fuze self-destruction time (s)	7.5 ÷ 14.5
Round mass (g)	833
Projectile mass (g)	389±6
Operating temperature (°C)	-40 ÷ +50

WEAPON COMPATIBILITY: antiaircraft guns 2A42, 2A72 and 2A38M



Ammunition 30 mm x 165 for 2A42, 2A72...



**ROUND 30 mm x 165
HE-T/HEI-T**

Technical Data

Calibre (mm)	30
Muzzle velocity (m/s)	960±15
Maximum pressure of powder gases (MPa)	360
Fuze arming distance (m)	100
Fuze self-destruction time (s)	7.5 ÷ 14.5
Tracer burning time (s)	min 10
Round mass (g)	832
Projectile mass (g)	386±6
Operating temperature (°C)	-40 ÷ +50

The 30 mm x 165 HE-T/HEI-T Round consists of a steel cartridge case with a percussion gun primer, propellant charge and a high-explosive tracer projectile.

The HE-T projectile is loaded with explosive and tracer composition and fitted with point-detonating fuze, with delayed action and pyrotechnical self-destruction.

Projectile designated as HEI-T is loaded with explosive-incendiary and tracer composition.

WEAPON COMPATIBILITY: antiaircraft guns 2A42, 2A72 and 2A38M

ROUND 30 mm x 165 AP



The 30 mm x 165 AP Round consists of a steel cartridge case with a percussion gun primer, propellant charge and an armour-piercing projectile.

Technical Data

Calibre (mm)	30
Muzzle velocity (m/s)	970±15
Maximum pressure of powder gases (MPa)	360
Round mass (g)	853
Projectile mass (g)	400±6
Operating temperature (°C)	-40 ÷ +50

WEAPON COMPATIBILITY: antiaircraft guns 2A42, 2A72 and 2A38M



Slobooda

Ammunition 30 mm x 165 for 2A42, 2A72...



**ROUND 30 mm x 165
AP-T**

Technical Data

Calibre (mm)	30
Muzzle velocity (m/s)	970±15
Maximum pressure of powder gases (MPa)	360
Round mass (g)	853
Projectile mass (g)	400±6
Tracer burning time (s)	min 3.5
Operating temperature (°C)	-40 ÷ +50

The 30 mm x 165 AP-T Round consists of a steel cartridge case with a percussion gun primer, propellant charge and an armour-piercing tracer projectile.

The AP-T projectile is filled with tracer composition.

WEAPON COMPATIBILITY: anti-aircraft guns 2A42, 2A72 and 2A38M

ROUND 30 mm x 165 TP



NEW

The 30 mm x 165 TP Round consists of a steel cartridge case with a percussion gun primer, propellant charge and a target practice projectile.

Technical Data

Calibre (mm)	30
Muzzle velocity (m/s)	960±15
Maximum pressure of powder gases (MPa)	360
Round mass (g)	833
Projectile mass (g)	389±6
Operating temperature (°C)	-40 ÷ +50

WEAPON COMPATIBILITY: antiaircraft guns 2A42, 2A72 and 2A38M



Sloboda

Ammunition 30 mm x 165 for 2A42, 2A72...



**ROUND 30 mm x 165
TP-T**

Technical Data

NEW

Calibre (mm)	30
Muzzle velocity (m/s)	960±15
Maximum pressure of powder gases (MPa)	360
Round mass (g)	833
Projectile mass (g)	389±6
Tracer burning time (s)	min 3
Operating temperature (°C)	-40 ÷ +50

The 30 mm x 165 TP-T Round consists of a steel cartridge case with a percussion gun primer, propellant charge and a target practice tracer projectile.

The TP-T projectile is filled with tracer composition.

WEAPON COMPATIBILITY: anti-aircraft guns 2A42, 2A72 and 2A38M

ROUND 30 mm x 173 HE/HEI



The 30 mm x 173 HE/HEI Round consists of a steel cartridge case with a percussion gun primer, propellant charge and a high-explosive projectile.

The HE projectile is loaded with explosive composition and with point-detonating fuze, with delayed action and pyrotechnical self-destruction.

Projectile designated as HEI is loaded with explosive-incendiary composition.

Technical Data

Calibre (mm)	30
Muzzle velocity (m/s)	1100±15
Maximum pressure of powder gases (MPa)	430
Fuze arming distance (m)	100
Fuze self-destruction time (s)	7.5 ÷ 14.5
Round mass (g)	838
Projectile mass (g)	357±5
Operating temperature (°C)	-40 ÷ +50

WEAPON COMPATIBILITY: gun MK30-2



Sloboda



**ROUND 30 mm x 173
AP**

Technical Data

NEW

Calibre (mm)	30
Muzzle velocity (m/s)	1100±15
Maximum pressure of powder gases (MPa)	430
Round mass (g)	843
Projectile mass (g)	362±5
Operating temperature (°C)	-40 ÷ +50

The 30 mm x 173 AP Round consists of a steel cartridge case with a percussion gun primer, propellant charge and an armour-piercing projectile.

WEAPON COMPATIBILITY: gun MK30-2

ROUND 30 mm x 173 TP


NEW

The 30 mm x 173 TP Round consists of a steel cartridge case with a percussion gun primer, propellant charge and a target practice projectile.

Technical Data

Calibre (mm)	30
Muzzle velocity (m/s)	1100±15
Maximum pressure of powder gases (MPa)	430
Round mass (g)	834
Projectile mass (g)	362±5
Operating temperature (°C)	-40 ÷ +50

WEAPON COMPATIBILITY: gun MK30-2



Sloboda



ROUND 30 mm x 210B HE/HEI

Technical Data

Calibre (mm)	30
Muzzle velocity (m/s)	1045+25
Maximum pressure of powder gases (MPa)	313.8
Fuze arming distance (m)	100
Fuze self-destruction time (s)	12 ÷ 17
Round mass (g)	1066
Projectile mass (g)	356±6
Operating temperature (°C)	-30 ÷ +50

The 30 mm x 210B HE/HEI Round consists of a steel cartridge case with an electrical gun primer, propellant charge and a high-explosive projectile.

The HE projectile is loaded with explosive composition and fitted with point-detonating fuze with pyrotechnical self-destruction.

Projectile designated as HEI is loaded with explosive-incendiary composition.

WEAPON COMPATIBILITY: antiaircraft gun 30 mm AK-230 and automatic gun 30 mm M86 on BTR 50

ROUND 30 mm x 220 HE-T/HEI-T



The 30 mm x 220 HE-T/HEI-T Round consists of a steel cartridge case with a percussion gun primer, propellant charge and a high-explosive tracer projectile.

The HE-T projectile is loaded with explosive and tracer composition and fitted with point-detonating fuze with mechanical self-destruction.

Projectile designated as HEI-T is loaded with explosive-incendiary and tracer composition.

Technical Data

Calibre (mm)	30
Muzzle velocity (m/s)	997±10
Maximum pressure of powder gases (MPa)	313.8
Fuze arming distance (m)	100
Fuze self-destruction time (s)	6 ÷ 17
Tracer burning time (s)	min 4
Round mass (g)	1140
Projectile mass (g)	435±8
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: antiaircraft gun 30/2 M53/M59



Sloboda



ROUND 37 mm x 252 HE-T/HEI-T

Technical Data

Calibre (mm)	37
Muzzle velocity (m/s)	866±15
Maximum pressure of powder gases (MPa)	300
Fuze arming distance (m)	300
Fuze self-destruction time (s)	8 ÷ 12
Tracer burning time (s)	min 6
Round mass (g)	1480
Projectile mass (g)	732±8
Operating temperature (°C)	-30 ÷ +50

The 37 mm x 252 HE-T/HEI-T Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a high-explosive tracer projectile.

The HE-T projectile is loaded with explosive and tracer composition and fitted with point-detonating fuze with pyrotechnical self-destruction.

Projectile designated as HEI-T is loaded with explosive-incendiary and tracer composition.

WEAPON COMPATIBILITY: antiaircraft gun 37 mm M1939 (SU)

ROUND 40 mm x 311 HE/HEI



The 40 mm x 311 HE/HEI Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a high-explosive projectile.

The HE projectile is loaded with explosive composition and fitted with point-detonating fuze with pyrotechnical self-destruction.

Projectile designated as HEI is loaded with explosive-incendiary composition.

Technical Data

Calibre (mm)	40
Muzzle velocity (m/s)	880±9
Maximum pressure of powder gases (MPa)	301
Fuze arming distance (m)	200
Fuze self-destruction time (s)	8 ÷ 12
Round mass (g)	2050
Projectile mass (g)	910±15
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: antiaircraft gun 40 mm L/60 BOFORS



Sloboda



ROUND 40 mm x 311 HE-T/HEI-T

Technical Data

Calibre (mm)	40
Muzzle velocity (m/s)	880±9
Maximum pressure of powder gases (MPa)	301
Fuze arming distance (m)	200
Fuze self-destruction time (s)	8 ÷ 12
Tracer burning time (s)	min 5
Round mass (g)	2050
Projectile mass (g)	910±15
Operating temperature (°C)	-30 ÷ +50

The 40 mm x 311 HE-T/HEI-T Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a high-explosive tracer projectile.

The HE-T projectile is loaded with explosive and tracer composition and fitted with point-detonating fuze with pyrotechnical self-destruction.

Projectile designated as HEI-T is loaded with explosive-incendiary and tracer composition.

WEAPON COMPATIBILITY: antiaircraft gun 40 mm L/60 BOFORS

ROUND 40 mm x 311 TP



NEW

The 40 mm x 311 TP Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a target practice projectile.

Technical Data

Calibre (mm)	40
Muzzle velocity (m/s)	880±9
Maximum pressure of powder gases (MPa)	301
Round mass (g)	2050
Projectile mass (g)	910±15
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: antiaircraft gun 40 mm L/60 BOFORS

Ammunition 40 mm x 365



Sloboda



**ROUND 40 mm x 365
HE/HEI**

Technical Data

Calibre (mm)	40
Muzzle velocity (m/s)	1005±12
Maximum pressure of powder gases (MPa)	319
Fuze arming distance (m)	250
Fuze self-destruction time (s)	8 ÷ 13
Round mass (g)	2500
Projectile mass (g)	964±15
Operating temperature (°C)	-30 ÷ +50

The 40 mm x 365 HE/HEI Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a high-explosive projectile.

The HE projectile is loaded with explosive composition and fitted with point-detonating fuze with pyrotechnical self-destruction.

Projectile designated as HEI is loaded with explosive-incendiary composition.

WEAPON COMPATIBILITY: antiaircraft gun 40 mm L/70 BOFORS

ROUND 40 mm x 365 HE-T/HEI-T



The 40 mm x 365 HE-T/HEI-T Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a high-explosive tracer projectile.

The HE-T projectile is loaded with explosive and tracer composition and fitted with point-detonating fuze with pyrotechnical self-destruction.

Projectile designated as HEI-T is loaded with explosive-incendiary and tracer composition.

Technical Data

Calibre (mm)	40
Muzzle velocity (m/s)	1005±12
Maximum pressure of powder gases (MPa)	319
Fuze arming distance (m)	250
Fuze self-destruction time (s)	8 ÷ 13
Tracer burning time (s)	min 4
Round mass (g)	2500
Projectile mass (g)	964±15
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: antiaircraft gun 40 mm L/70 BOFORS



**ROUND 40 mm x 365
AP**

Technical Data

NEW

Calibre (mm)	40
Muzzle velocity (m/s)	1025±12
Maximum pressure of powder gases (MPa)	319
Round mass (g)	2500
Projectile mass (g)	935±15
Operating temperature (°C)	-30 ÷ +50

The 40 mm x 365 AP Round consists of a brass cartridge case with a percussion gun primer, propellant charge and an armour-piercing projectile.

WEAPON COMPATIBILITY: anti-aircraft gun 40 mm L/70 BOFORS

ROUND 40 mm x 365 AP-T



Technical Data

The 40 mm x 365 AP-T Round consists of a brass cartridge case with a percussion gun primer, propellant charge and an armour-piercing tracer projectile.

The AP-T projectile is filled with tracer composition.

Calibre (mm)	40
Muzzle velocity (m/s)	1025±12
Maximum pressure of powder gases (MPa)	319
Round mass (g)	2500
Projectile mass (g)	935±15
Tracer burning time (s)	min 3
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: anti-aircraft gun 40 mm L/70 BOFORS

Ammunition 40 mm x 365



Sloboda



ROUND 40 mm x 365
TP

Technical Data

NEW

Calibre (mm)	40
Muzzle velocity (m/s)	1005±12
Maximum pressure of powder gases (MPa)	319
Round mass (g)	2500
Projectile mass (g)	964±15
Operating temperature (°C)	-30 ÷ +50

The 40 mm x 365 TP Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a target practice projectile.

WEAPON COMPATIBILITY: anti-aircraft gun 40 mm L/70 BOFORS

ROUND 40 mm x 365 TP-T



The 40 mm x 365 TP-T Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a target practice tracer projectile.

The TP-T projectile is filled with tracer composition.

Technical Data

Calibre (mm)	40
Muzzle velocity (m/s)	1005±12
Maximum pressure of powder gases (MPa)	319
Round mass (g)	2500
Projectile mass (g)	964±12
Tracer burning time (s)	min 4
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: antiaircraft gun 40 mm L/70 BOFORS



Sloboda



ROUND 57 mm x 348 HE-T

Technical Data

Calibre (mm)	57
Muzzle velocity (m/s)	1000±15
Maximum pressure of powder gases (MPa)	320
Fuze arming distance (m)	250
Fuze self-destruction time (s)	13 ÷ 17
Tracer burning time (s)	min 10
Round mass (g)	6350
Projectile mass (g)	2850±28
Operating temperature (°C)	-30 ÷ +50

The 57 mm x 348 HE-T Round consists of a brass cartridge case with a percussion gun primer, propellant charge and a high-explosive tracer projectile.

The HE-T projectile is loaded with explosive and tracer composition and fitted with point-detonating fuze with pyrotechnical self-destruction.

WEAPON COMPATIBILITY: antiaircraft guns 57 mm S-68 and S/60

ROUND 57 mm x 438 HE



NEW

The 57 mm x 438 HE Round consists of a brass cartridge case with an electrical gun primer, propellant charge and a high-explosive projectile.

The HE projectile is loaded with explosive composition and fitted with point-detonating fuze.

Technical Data

Calibre (mm)	57
Muzzle velocity (m/s)	1020±12
Maximum pressure of powder gases (MPa)	330
Fuze arming distance (m)	400
Round mass (g)	6100
Projectile mass (g)	2400±36
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: antiaircraft gun 57 mm L/70 BOFORS

Ammunition 57 mm x 438



Sloboda



**ROUND 57 mm x 438
TP**

Technical Data

NEW

Calibre (mm)	57
Muzzle velocity (m/s)	1020±12
Maximum pressure of powder gases (MPa)	330
Round mass (g)	6100
Projectile mass (g)	2400±36
Operating temperature (°C)	-30 ÷ +50

The 57 mm x 438 TP Round consists of a brass cartridge case with an electrical gun primer, propellant charge and a target practice projectile.

WEAPON COMPATIBILITY: anti-aircraft gun 57 mm L/70 BOFORS

**ROUND 76 mm
WITH PROJECTILE
HE M70
AND VARIABLE
PROPELLANT CHARGE
M70**



The round 76 mm is separate loaded, with a high-explosive projectile M70 and a variable propellant charge M70.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles.

The projectile is filled with TNT explosive.

A fuze UTI M68P1 is screwed on the projectile.

The variable propellant charge M70 is initiated by a gun primer KT M71.

Technical Data

Calibre (mm)	76
Projectile muzzle velocity (m/s)	398
Mean maximum pressure of powder gases (bar)	≤ 2011
Maximum range (m)	8750
Projectile length, with fuze (mm)	345
Projectile mass, tabular (kg)	6.2
Explosive charge mass (kg)	0.61
Cartridge case length (mm)	385.3
Cartridge case mass (kg)	1.7
Propellant charge mass (kg)	0.38
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 76 mm mountain gun M48 B-1



Ammunition 76 mm M48 B-1



ROUND 76 mm WITH SMOKE PROJECTILE M60 AND VARIABLE PROPELLANT CHARGE M70

Technical Data

Calibre (mm)	76
Projectile muzzle velocity (m/s)	398
Mean maximum pressure of powder gases (bar)	≤ 2011
Maximum range (m)	8750
Projectile length, with fuze (mm)	345
Projectile mass, tabular (kg)	6.2
White phosphorus mass (kg)	0.53
Cartridge case length (mm)	385.3
Cartridge case mass (kg)	1.7
Propellant charge mass (kg)	0.38
Operating temperature (°C)	-30 ÷ +50

The round 76 mm is separate loaded, with a smoke projectile M60 and a variable propellant charge M70.

It is intended for creating smoke screen on the battlefield.

The projectile is filled with white phosphorus.

A fuze UTI M68P1 is screwed on the projectile.

The variable propellant charge M70 is initiated by a gun primer KT M71.

WEAPON COMPATIBILITY: 76 mm mountain gun M48 B-1

ROUND 76 mm BLANK (SALUTE)



NEW

The round 76 mm BLANK (SALUTE) is intended for live fire simulation during manoeuvres, exercises and tactical operations.

It is used for gun salute.

The round consists of a cartridge case 76 mm M48 B-1 filled with propellant charge with igniter and a gun primer KT M71.

Technical Data

Calibre (mm)	76
Round length (mm)	max 320
Round mass (kg)	2
Muzzle safety (m)	min 100
Noise level (dB)	min 120
Powder	NC-01
Propellant charge mass (g)	120
Igniter (black powder N°7) mass (g)	30
Cartridge case mass (kg)	1.56
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 76 mm mountain gun M48 B-1



Ammunition 76 mm ZIS-3



ROUND 76 mm WITH PROJECTILE HE M70 AND VARIABLE PROPELLANT CHARGE M70

Technical Data

Calibre (mm)	76
Projectile muzzle velocity (m/s)	484
Mean maximum pressure of powder gases (bar)	≤ 1844
Maximum range (m)	10000
Projectile length, with fuze (mm)	345
Projectile mass, tabular (kg)	6.2
Explosive charge mass (kg)	0.61
Cartridge case length (mm)	385.3
Cartridge case mass (kg)	1.7
Propellant charge mass (kg)	0.466
Operating temperature (°C)	-30 ÷ +50

NEW

The round 76 mm is separate loaded, with a high-explosive projectile M70 and a variable propellant charge M70.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles.

The projectile is filled with TNT explosive.

A fuze UTI M68P1 is screwed on the projectile.

The variable propellant charge M70 is initiated by a gun primer KT M71.

WEAPON COMPATIBILITY: 76 mm gun M42 (ZIS-3)

ROUND 76 mm WITH SMOKE PROJECTILE M60 AND VARIABLE PROPELLANT CHARGE M70



NEW

The round 76 mm is separate loaded, with a smoke projectile M60 and a variable propellant charge M70.

It is intended for creating smoke screen on the battlefield.

The projectile is filled with white phosphorus.

A fuze UTI M68P1 is screwed on the projectile.

The variable propellant charge M70 is initiated by a gun primer KT M71.


Technical Data

Calibre (mm)	76
Projectile muzzle velocity (m/s)	484
Mean maximum pressure of powder gases (bar)	≤ 1844
Maximum range (m)	10000
Projectile length, with fuze (mm)	345
Projectile mass, tabular (kg)	6.2
White phosphorus mass (kg)	0.53
Cartridge case length (mm)	385.3
Cartridge case mass (kg)	1.7
Propellant charge mass (kg)	0.466
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 76 mm gun M42 (ZIS-3)



Ammunition 76 mm ZIS-3

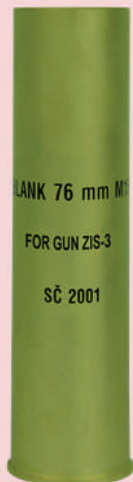

ROUND 76 mm BLANK (SALUTE)

Technical Data

NEW

Calibre (mm)	76
Round length (mm)	max 320
Round mass (kg)	1.91
Muzzle safety (m)	min 100
Noise level (dB)	min 120
Powder	NC-01
Propellant charge mass (g)	120
Igniter (black powder N°7) mass (g)	30
Cartridge case mass (kg)	1.56
Operating temperature (°C)	-30 ÷ +50

The round 76 mm BLANK (SALUTE) is intended for live fire simulation during manoeuvres, exercises and tactical operations.

It is used for gun salute.

The round consists of a cartridge case 76 mm M72P1 filled with propellant charge with igniter and a gun primer KT M71.

WEAPON COMPATIBILITY: 76 mm gun M42 (ZIS-3)

**ROUND 100 mm
FIXED WITH
HE PROJECTILE M63P2
WITH FULL
PROPELLANT CHARGE**



The round 100 mm consists of an assembled brass cartridge case and a high-explosive projectile.

The projectile is filled with HAL-20 explosive.

A fuze UTIU M72B1 is screwed on the projectile.

The round is intended for direct and indirect firing on the personnel, light fortifications and unarmored and lightly armored vehicles.

WEAPON COMPATIBILITY: 100 mm tank gun D-10 on tank T-55, 100 mm self-propelled gun M44, 100 mm coastal gun M87

Technical Data

Calibre (mm)	100
Projectile muzzle velocity (m/s)	900
Mean maximum pressure of powder gases (bar)	2942
Round length, with fuze (mm)	1095
Projectile length, with fuze (mm)	490
Cartridge case length (mm)	695
Round mass (kg)	30
Projectile mass (kg)	15.6
Propellant charge mass (kg)	5.5
Explosive charge mass (kg)	1.58
Operating temperature (°C)	-30 ÷ +50



Ammunition 100 mm



ROUND 100 mm FIXED WITH HIGH-EXPLOSIVE PROJECTILE M82 WITH FULL PROPELLANT CHARGE

Technical Data

Calibre (mm)	100
Projectile muzzle velocity (m/s)	700
Mean maximum pressure of powder gases (bar)	1864
Round length, with fuze (mm)	1283
Projectile length, with fuze (mm)	674
Cartridge case length (mm)	913
Round mass (kg)	28.7
Projectile mass (kg)	16.7
Empty steel cartridge case mass (kg)	8.2
Explosive charge mass (kg)	2.2
Propellant charge mass (kg)	4.6
Tracer burning time (s)	4
Operating temperature (°C)	-30 ÷ +50

NEW

The round 100 mm is fixed, with a high-explosive projectile 100 mm M82.

The round consists of an assembled steel cartridge case and a high-explosive projectile.

The projectile is filled with TNT explosive.

A fuze UTIU M85P1 and a tracer N°12 are screwed into the projectile.

The round is intended for direct and indirect firing of personnel, light fortifications and unarmored and lightly armored vehicles.

WEAPON COMPATIBILITY: 100 mm antitank guns T-12 and MT-12

ROUND 100 mm FIXED WITH HEAT-T M15



NEW

The round 100 mm is fixed, with 100 mm HEAT-T M15 projectile.

The round consists of an assembled steel cartridge case and a high-explosive anti-tank tracer (HEAT-T) projectile.

The projectile is filled with FO-4.5S explosive.

A fuze UT-PE M87P1 and a tracer N°12 are screwed into the projectile.

The 100 mm round with HEAT-T M15 is intended for antitank combat and demolition of facilities.

Technical Data

Calibre (mm)	100
Projectile muzzle velocity (m/s)	1075
Mean maximum pressure of powder gases (bar)	2157
Round length, with fuze (mm)	1284
Projectile length, with fuze (mm)	581
Cartridge case length (mm)	913
Round mass (kg)	22.5
Projectile mass (kg)	9.5
Empty steel cartridge case mass (kg)	8.2
Explosive charge mass (kg)	1
Propellant charge mass (kg)	4.6
Tracer burning time (s)	4
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 100 mm antitank guns T-12 and MT-12



Ammunition 105 mm M56



**ROUND 105 mm
WITH
PROJECTILE HE M1
AND PROPELLANT
CHARGE M2**

Technical Data

Calibre (mm)	105
Projectile muzzle velocity (m/s)	491 (for M56) 472 (for M2A1)
Mean maximum pressure of powder gases (bar)	≤ 2305
Maximum range (m)	11600 (for M56) 11200 (for M2A1)
Projectile length, with fuze (mm)	496
Projectile mass, tabular (kg)	14.9
Explosive charge mass (kg)	2.11
Cartridge case length (mm)	371.856
Propellant charge mass (kg)	1.3
Operating temperature (°C)	-30 ÷ +50

The round 105 mm is separate loaded, with a high-explosive projectile M1 and a propellant charge M2.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles.

The projectile is filled with TNT explosive.

A fuze UTIU M02P1 is screwed on the projectile.

The full propellant charge M2 is in a brass cartridge case 105 mm M14 and is initiated by a gun primer KT M28A2.

WEAPON COMPATIBILITY: 105 mm howitzers M56 and M2A1

ROUND 105 mm WITH PROJECTILE HE ER-BT M15 AND FULL VARIABLE PROPELLANT CHARGE M15A



The round 105 mm is separate loaded, with a high-explosive projectile M15 and a full variable propellant charge M15A.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles.

The projectile is filled with TNT explosive.

A fuze UTIU M02 is screwed on the projectile.

The full variable propellant charge M15A is in a brass cartridge case 105 mm M14 and is initiated by a gun primer KT M02.

Technical Data

Calibre (mm)	105
Projectile muzzle velocity (m/s)	645
Mean maximum pressure of powder gases (bar)	≤ 2500
Maximum range (m)	14500
Projectile length, with fuze (mm)	566.6
Projectile mass, tabular (kg)	13
Explosive charge mass (kg)	2.2
Cartridge case length (mm)	371.856
Propellant charge mass (kg)	2.3
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 105 mm howitzer M56



Ammunition 105 mm M56



ROUND 105 mm WITH PROJECTILE HE ER-BB M15 AND FULL PROPELLANT CHARGE M15A

Technical Data

Calibre (mm)	105
Projectile muzzle velocity (m/s)	610
Mean maximum pressure of powder gases (bar)	≤ 2650
Maximum range (m)	16500
Projectile length, with fuze (mm)	565.7
Projectile mass, tabular (kg)	14.07
Explosive charge mass (kg)	2.2
Cartridge case length (mm)	371.856
Cartridge case mass (kg)	2.105
Operating temperature (°C)	-30 ÷ +50

The round 105 mm is separate loaded, with a high-explosive projectile M15 and a full propellant charge M15A without increment charge.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles.

The projectile is filled with TNT explosive.

A fuze UTIU M02 is screwed on the projectile.

The full propellant charge M15A, without increment charge, is in a brass cartridge case 105 mm M14 and is initiated by a gun primer KT M02.

WEAPON COMPATIBILITY: 105 mm howitzer M56

ROUND 105 mm WITH SMOKE PROJECTILE WP M60 AND PROPELLANT CHARGE M2



The round 105 mm is separate loaded, with a smoke projectile M60 and a propellant charge M2.

It is intended for creating smoke screen on the battlefield.

The projectile is filled with white phosphorus..

A fuze UTIU M02P1 is screwed on the projectile.

The full propellant charge M2 is in a brass cartridge case 105 mm M14 and is initiated by a gun primer KT M28A2.

Technical Data

Calibre (mm)	105
Projectile muzzle velocity (m/s)	491 (for M56) 472 (for M2A1)
Mean maximum pressure of powder gases (bar)	≤ 2305
Maximum range (m)	11600 (for M56) 11200 (for M2A1)
Projectile length, with fuze (mm)	496
Projectile mass, tabular (kg)	15.8
White phosphorus mass (kg)	1.7
Cartridge case length (mm)	371.856
Propellant charge mass (kg)	1.3
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 105 mm howitzers M56 and M2A1



Ammunition 105 mm M56



ROUND 105 mm WITH ILLUMINATING PROJECTILE M314A4 AND PROPELLANT CHARGE M2

Technical Data

Calibre (mm)	105
Projectile muzzle velocity (m/s)	461 (for M56) 443 (for M2A1)
Mean maximum pressure of powder gases (bar)	≤ 2305
Maximum range of illumination (m)	9200 (for M56) 9300 (for M2A1)
Projectile length, with fuze (mm)	487.8
Projectile mass, tabular (kg)	16.6
Flare composition mass (kg)	0.76
Light intensity (cd)	min 400000
Torch burning time (s)	min 30
Propellant charge mass (kg)	1.3
Operating temperature (°C)	-30 ÷ +50

The round 105 mm is separate loaded, with an illuminating projectile M314A4 and a propellant charge M2.

It is intended for illuminating the battlefield.


The projectile is assembled with an illuminating torch.

A fuze UTE M10 is screwed on the projectile and is timed with UTIF device (setter) before firing the projectile.

The propellant charge M2 is in a brass cartridge case 105 mm M14 and is initiated by a gun primer KT M28A2.

WEAPON COMPATIBILITY: 105 mm howitzers M56 and M2A1

ROUND 105 mm BLANK (SALUTE)

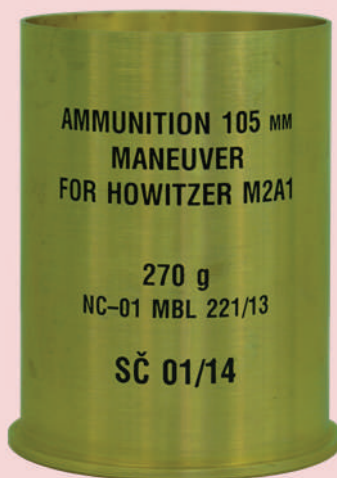

Technical Data

The round 105 mm BLANK (SALUTE) is intended for simulation of live firing during manoeuvres, exercises and tactical operations.

It is used for gun salute.

The round consists of a cartridge case 105 mm SALUTE filled with propellant charge with igniter and a gun primer KT M1.

Calibre (mm)	105
Round length (mm)	max 153
Round mass (kg)	2.4
Muzzle safety (m)	min 100
Noise level (dB)	min 100
Powder	NC-01
Propellant charge mass (g)	270
Igniter (black powder N°7) mass (g)	50
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY 105 mm
howitzers M56 and M2A1.



Ammunition 105 mm M56/33



ROUND 105 mm WITH PROJECTILE HE M1 AND PROPELLANT CHARGE M2

Technical Data

Calibre (mm)	105
Projectile muzzle velocity (m/s)	507
Mean maximum pressure of powder gases (bar)	≤ 2305
Maximum range (m)	11900
Projectile length, with fuze (mm)	496
Projectile mass, tabular (kg)	14.9
Explosive charge mass (kg)	2.11
Cartridge case length (mm)	371.856
Propellant charge mass (kg)	1.3
Operating temperature (°C)	-30 ÷ +50

The round 105 mm is separate loaded, with a high-explosive projectile M1 and a propellant charge M2.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles.

The projectile is filled with TNT explosive.

The fuze UTIU M02P1 is screwed on the projectile.

The full propellant charge M2 is in a brass cartridge case 105 mm M14 and is initiated by a gun primer KT M28A2.

WEAPON COMPATIBILITY: 105 mm howitzers M56/33

**ROUND 105 mm
WITH PROJECTILE
HE ER-BT M15
AND FULL VARIABLE
PROPELLANT CHARGE
M15**



The round 105 mm is separate loaded, with a high-explosive projectile M15 and a full variable propellant charge M15.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles.

The projectile is filled with TNT explosive.

The fuze UTIU M02 is screwed on the projectile.

The full variable propellant charge M15 is in a brass cartridge case 105 mm M14 and is initiated by a gun primer KT M02.

Technical Data

Calibre (mm)	105
Projectile muzzle velocity (m/s)	675
Mean maximum pressure of powder gases (bar)	≤ 2500
Maximum range (m)	15000
Projectile length, with fuze (mm)	566.6
Projectile mass, tabular (kg)	13
Explosive charge mass (kg)	2.2
Cartridge case length (mm)	371.856
Propellant charge mass (kg)	2.3
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 105 mm howitzer M56/33



Ammunition 105 mm M56/33



**ROUND 105 mm
WITH PROJECTILE
HE ER-BB M15 AND
FULL PROPELLANT
CHARGE M15**

Technical Data

Calibre (mm)	105
Projectile muzzle velocity (m/s)	670
Mean maximum pressure of powder gases (bar)	≤ 2650
Maximum range (m)	18000
Projectile length, with fuze (mm)	565.7
Projectile mass, tabular (kg)	14.07
Explosive charge mass (kg)	2.2
Cartridge case length (mm)	371.856
Propellant charge mass (kg)	2.2
Operating temperature (°C)	-30 ÷ +50

The round 105 mm is separate loaded, with a high-explosive projectile M15 and a full propellant charge M15.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles.

The projectile is filled with TNT explosive. A fuze UTIU M02 is screwed on the projectile.

The full propellant charge M15 is in a brass cartridge case 105 mm M14 and is initiated by gun primer KT M02.

WEAPON COMPATIBILITY: 105 mm howitzer M56/33

ROUND 105 mm WITH SMOKE PROJECTILE WP M60 AND PROPELLANT CHARGE M2



NEW

The round 105 mm is separate loaded, with a smoke projectile M60 and a propellant charge M2.

It is intended for creating smoke screen on the battlefield.

The projectile is filled with white phosphorus.

A fuze UTIU M02P1 is screwed on the projectile.

The full propellant charge M2 is in a brass cartridge case 105 mm M14 and is initiated by gun primer KT M28A2.

Technical Data

Calibre (mm)	105
Projectile muzzle velocity (m/s)	507
Mean maximum pressure of powder gases (bar)	≤ 2305
Maximum range (m)	11900
Projectile length, with fuze (mm)	496
Projectile mass, tabular (kg)	15.8
White phosphorus mass (kg)	1.7
Cartridge case length (mm)	371.856
Propellant charge mass (kg)	1.3
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 105 mm howitzers M56/33



Ammunition 122 mm



ROUND 122 mm
WITH PROJECTILE
HE 462A1 AND FULL
PROPELLANT CHARGE
M78

Technical Data

Calibre (mm)	122
Projectile muzzle velocity (m/s)	690
Mean maximum pressure of powder gases (bar)	≤ 2450
Maximum range (m)	15000
Projectile length, with fuze (mm)	max 565
Projectile mass, tabular (kg)	21.76
Explosive charge mass (kg)	3.6
Cartridge case length (mm)	447
Cartridge case 122 mm mass (kg)	3.66 (for M78) 4.06 (for M19)
Propellant charge mass (kg)	3.8
Operating temperature (°C)	-30 ÷ +50

The round 122 mm is separate loaded, with a high-explosive projectile 462A1 and a full propellant charge M78.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles.

The projectile is filled with TNT explosive.

A fuze UTIU M72B1 is screwed on the projectile.

The full propellant charge M78 is in a steel cartridge case 122 mm M78 or a brass cartridge case 122 mm M19 and is initiated by a gun primer KT M71.

WEAPON COMPATIBILITY: 122 mm howitzers D-30, D-30J and SP 2S1

ROUND 122 mm WITH PROJECTILE HE 462A1 AND REDUCED VARIABLE PROPELLANT CHARGE M78



Technical Data

The round 122 mm is separate loaded, with a high-explosive projectile 462A1 and a reduced variable propellant charge M78.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles.

The projectile is filled with TNT explosive. A fuze UTIU M72B1 is screwed on the projectile.

The reduced variable propellant charge M78 is in a steel cartridge case 122 mm M78 or a brass cartridge case 122 mm M19 and is initiated by a gun primer KT M71.

Calibre (mm)	122
Projectile muzzle velocity (m/s)	565
Mean maximum pressure of powder gases (bar)	≤ 2450
Maximum range (m)	12800
Projectile length, with fuze (mm)	max 565
Projectile mass, tabular (kg)	21.76
Explosive charge mass (kg)	3.6
Cartridge case length (mm)	447
Cartridge case 122 mm mass (kg)	3.66 (for M78) 4.06 (for M19)
Propellant charge mass (kg)	2.6
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 122 mm howitzers D-30, D-30J and SP 251


Sloboda
Ammunition 122 mm


**ROUND 122 mm
WITH PROJECTILE
HE ER M10
AND FULL VARIABLE
PROPELLANT CHARGE
M10**

Technical Data

Calibre (mm)	122
Projectile muzzle velocity (m/s)	745
Mean maximum pressure of powder gases (bar)	≤ 2450
Maximum range (m)	18300
Projectile length, with fuze (mm)	max 658
Projectile mass, tabular (kg)	20.2
Explosive charge mass (kg)	3.78
Cartridge case length (mm)	447
Cartridge case mass (kg)	3.66
Propellant charge mass (kg)	4.16
Operating temperature (°C)	-30 ÷ +50

The round 122 mm is separate loaded, with a high-explosive projectile M10 and a full variable propellant charge M10.

It is intended for destruction or neutralization of personnel, light fortifications, unarmored and lightly armored vehicles, artillery and rocket batteries on location, command positions, towing convoys at rest or in motion.

The projectile is filled with HAL-20 explosive.

A fuze UTIU M02P1 is screwed on the projectile.

The full variable propellant charge M10 (it consists of a base charge M10 and an increment charge M10) is in a steel cartridge case 122 mm M78 and is initiated by a gun primer KT M71.

WEAPON COMPATIBILITY: 122 mm howitzers D-30, D-30J and SP 251

ROUND 122 mm WITH PROJECTILE HE ER-BB M10 AND BASE PROPELLANT CHARGE M10



The round 122 mm is separate loaded, with a high-explosive projectile M10 (of extended range, with base-bleed mechanism) and a base propellant charge M10.

It is intended for destruction or neutralization of personnel, light fortifications, unarmored and lightly armored vehicles, artillery and rocket batteries on location, command positions, towing convoys at rest or in motion.

The projectile is filled with HAL-20 explosive.

A fuze UTIU M02P1 is screwed on the projectile.

The base propellant charge M10 is in a steel cartridge case 122 mm M78 and is initiated by a gun primer KT M71.

Technical Data

Calibre (mm)	122
Projectile muzzle velocity (m/s)	715
Mean maximum pressure of powder gases (bar)	≤ 2450
Maximum range (m)	21100
Projectile length, with fuze (mm)	max 658
Projectile mass, tabular (kg)	21.7
Explosive charge mass (kg)	3.78
Cartridge case length (mm)	447
Cartridge case mass (kg)	3.66
Propellant charge mass (kg)	3.95
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 122 mm howitzers D-30, D-30J and SP 251



Ammunition 122 mm



ROUND 122 mm WITH PROJECTILE WP M60 AND FULL PROPELLANT CHARGE M78

Technical Data

Calibre (mm)	122
Projectile muzzle velocity (m/s)	5690
Mean maximum pressure of powder gases (bar)	≤ 2450
Maximum range (m)	15000
Projectile length, with fuze (mm)	max 565
Projectile mass, tabular (kg)	21.76
White phosphorus mass (kg)	2.95
Cartridge case length (mm)	447
Cartridge case 122 mm mass (kg)	3.66 (for M78) 4.06 (for M19)
Propellant charge mass (kg)	3.8
Operating temperature (°C)	-30 ÷ +50

NEW

The round 122 mm is separate loaded, with a smoke projectile M60 and a full propellant charge M78.

It is intended for creating smoke screen on the battlefield.

The projectile is filled with white phosphorus.

A fuze UTIU M72B1 is screwed on the projectile.

The full propellant charge M78 is in a steel cartridge case 122 mm M78 or a brass cartridge case 122 mm M19 and is initiated by a gun primer KT M71.

WEAPON COMPATIBILITY: 122 mm howitzers D-30, D-30J and SP 2S1

ROUND 122 mm WITH PROJECTILE WP M60 AND REDUCED VARIABLE PROPELLANT CHARGE M78



The round 122 mm is separate loaded, with a smoke projectile M60 and a reduced variable propellant charge M78.

It is intended for creating smoke screen on the battlefield.

The projectile is filled with white phosphorus.

A fuze UTIU M72B1 is screwed on the projectile.

The reduced variable propellant charge M78 is in a steel cartridge case 122 mm M78 or a brass cartridge case 122 mm M19 and is initiated by a gun primer KT M71.

Technical Data

Calibre (mm)	122
Projectile muzzle velocity (m/s)	565
Mean maximum pressure of powder gases (bar)	≤ 2450
Maximum range (m)	12800
Projectile length, with fuze (mm)	max 565
Projectile mass, tabular (kg)	21.76
White phosphorus mass (kg)	2.95
Cartridge case length (mm)	447
Cartridge case 122 mm mass (kg)	3.66 (for M78) 4.06 (for M19)
Propellant charge mass (kg)	2.6
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 122 mm howitzers D-30, D-30J and SP 2S1



Sloboda

Ammunition 122 mm



**ROUND 122 mm
WITH ILLUMINATING
PROJECTILE S-463
AND FULL
PROPELLANT CHARGE
M78**

Technical Data

Calibre (mm)	122
Projectile muzzle velocity (m/s)	687
Mean maximum pressure of powder gases (bar)	≤ 2450
Maximum range of illumination (m)	15200
Projectile length, with fuze (mm)	max 516
Projectile mass, tabular (kg)	22.175
Light intensity (cd)	min 700000
Torch burning time (s)	min 55
Propellant charge mass (kg)	3.8
Cartridge case 122 mm mass (kg)	3.66 (for M78) 4.06 (for M19)
Operating temperature (°C)	-30 ÷ +50

The round 122 mm is separate loaded, with an illuminating projectile S-463 and a full propellant charge M78.

It is intended for illuminating the battlefield.

The projectile is assembled with an illuminating torch.

A fuze UTE M10 is screwed on the projectile and is timed with UTIF device (setter) before firing the projectile.

The full propellant charge M78 is in a steel cartridge case 122 mm M78 or a brass cartridge case 122 mm M19 and is initiated by a gun primer KT M71.

WEAPON COMPATIBILITY: 122 mm howitzers D-30, D-30J and SP 2S1

ROUND 122 mm WITH ILLUMINATING PROJECTILE S-463 AND REDUCED VARIABLE PROPELLANT CHARGE M78



NEW

The round 122 mm is separate loaded, with an illuminating projectile S-463 and a reduced variable propellant charge M78.

It is intended for illuminating the battlefield.

The projectile is assembled with an illuminating torch.

A fuze UTE M10 is screwed on the projectile and is timed with UTIF device (setter) before firing the projectile.

The reduced variable propellant charge M78 is in a steel cartridge case 122 mm M78 or a brass cartridge case 122 mm M19 and is initiated by a gun primer KT M71.

Technical Data

Calibre (mm)	122
Projectile muzzle velocity (m/s)	562
Mean maximum pressure of powder gases (bar)	≤ 2450
Maximum range of illumination (m)	12400
Projectile length, with fuze (mm)	max 516
Projectile mass, tabular (kg)	22.175
Light intensity (cd)	min 700000
Torch burning time (s)	min 55
Propellant charge mass (kg)	2.6
Cartridge case 122 mm mass (kg)	3.66 (for M78) 4.06 (for M19)
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 122 mm howitzers D-30, D-30J and SP 251



Ammunition 122 mm



**ROUND 122 mm
BLANK (SALUTE)**

Technical Data

NEW

Calibre (mm)	122
Round length (kg)	max 447
Round mass (kg)	4.41
Muzzle safety (m)	min 100
Noise level (dB)	min 100
Powder	NC-01
Propellant charge mass (g)	350
Igniter (black powder N°7) mass (g)	50
Cartridge case mass (kg)	3.66
Operating temperature (°C)	-30 ÷ +50

The round 122 mm BLANK (SALUTE) is intended for simulation of live firing during manoeuvres, exercises and tactical operations.

It is used for gun salute.

The round consists of a cartridge case 122 mm M78 filled with propellant charge with igniter and a gun primer KT M71.

WEAPON COMPATIBILITY: 122 mm howitzers D-30, D-30J and SP 2S1

ROUND 125 mm WITH PROJECTILE HE M86P2



The round 125 mm is separately loaded, with a high-explosive projectile M86P2 and a base propellant charge M88.

It is intended for direct and indirect firing of personnel, light fortifications, non-armored or lightly armored vehicles.

The projectile is assembled with HAL-20 explosive.

A fuze UTIU M85P1 is screwed on the projectile and it can be adjusted to superquick or delay action.

The base propellant charge M88 is with a combustible sabot and a short steel cartridge case and is activated by an electro-shock primer KT-EU M84.

Technical Data

Calibre (mm)	125
Projectile muzzle velocity (m/s)	850
Mean maximum pressure of powder gases (bar)	≤ 3432
Maximum range (m)	12200
Projectile length, with fuze (mm)	674
Projectile mass, tabular (kg)	23
Explosive charge mass (kg)	3.28
Base propellant charge mass (kg)	9.5
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 125 mm gun D-81 on tanks M84 or T-72



Ammunition 125 mm



**ROUND 125 mm
WITH
SUBCALIBER
PROJECTILE
APFSDS-T M88**

Technical Data

Calibre (mm)	125
Projectile muzzle velocity (m/s)	1785
Mean maximum pressure of powder gases (bar)	≤ 4590
Maximum effective range (m)	4000
Projectile length (mm)	591
Bullet mass, tabular (kg)	5.86
Projectile mass, tabular (kg)	3.807
Projectile penetration (mm)	254
Increment charge mass (kg)	4.14
Tracer burning time (s)	2
Base propellant charge mass (kg)	9.5
Operating temperature (°C)	-30 ÷ +50

The round 125 mm is separately loaded, with a subcaliber-tracer projectile with core APFSDS-T M88 and a base propellant charge M88.

It is intended for actions against tanks, self-propelled artillery weapons and other armored targets.

A tracer №13 is screwed on the projectile.

The base propellant charge M88 is with a combustible sabot and a short steel cartridge case and is activated by an electro-shock primer KT-EU M84.

WEAPON COMPATIBILITY: 125 mm gun D-81 on tanks M84 or T-72

ROUND 125 mm WITH PROJECTILE HEAT-T M88P1



The round 125 mm is separately loaded, with a projectile HEAT-T M88P1 and a base propellant charge M88.

It is intended for antitank combat and demolition of buildings.

The projectile is assembled with FO-4.5 explosive.

A fuze UT-PE M87P1 (upper and lower), which is mechanical and piezoelectric, and a tracer N°12 are screwed on the projectile.

The base propellant charge M88 is with a combustible sabot and a short steel cartridge case and is activated by an electro-shock primer KT-EU M84.

Technical Data

Calibre (mm)	125
Projectile muzzle velocity (m/s)	905
Mean maximum pressure of powder gases (bar)	≤ 2942
Maximum effective range (m)	4000
Projectile length, with fuze (mm)	678
Projectile mass, tabular (kg)	19
Explosive charge mass (kg)	≈ 2
Projectile penetration (mm)	400
Tracer burning time (s)	4
Base propellant charge mass (kg)	9.5
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 125 mm gun D-81 on tanks M84 or T-72



Ammunition 125 mm



**ROUND 125 mm
WITH
TRAINING
PROJECTILE
HEAT-T M17**

Technical Data

NEW

Calibre (mm)	125
Projectile muzzle velocity (m/s)	905
Mean maximum pressure of powder gases (bar)	≤ 2942
Maximum effective range (m)	4000
Projectile length (mm)	678
Projectile mass, tabular (kg)	19
Tracer burning time (s)	4
Base propellant charge mass (kg)	9.5
Operating temperature (°C)	-30 ÷ +50

The round 125 mm with training projectile HEAT-T M17 is intended for conducting training for antiarmor combat by direct firing from a tank gun 125 mm.

A tracer N°12 is screwed on the projectile.

The base propellant charge M88 is with a combustible sabot and a short steel cartridge case and is activated by electro-impact primer KT-EU M84.

WEAPON COMPATIBILITY: 125 mm gun D-81 on tanks M84 or T-72

**ROUND 130 mm
WITH
HIGH-EXPLOSIVE
PROJECTILE M79
AND FULL VARIABLE
PROPELLANT CHARGE
M46**



Technical Data

The round 130 mm is separately loaded, with a high-explosive projectile M79 and a full variable propellant charge M46.

It is intended for destruction of personnel, light fortifications, unarmored and lightly armored vehicles, etc.

The projectile is assembled with TNT explosive.

A fuze UTIU M72B1 is screwed on the projectile and it can be adjusted to superquick or delay action.

The full variable propellant charge M46 is activated by a gun primer KT M71.

Calibre (mm)	130
Projectile muzzle velocity (m/s)	930
Mean maximum pressure of powder gases (bar)	≤ 3090
Maximum range (m)	27400
Projectile length, with fuze (mm)	674
Projectile mass, tubular (kg)	33.4
Explosive charge mass (kg)	3.67
Cartridge case length (mm)	846
Cartridge case mass (kg)	11.35
Propellant charge mass (kg)	13.5
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 130 mm gun M46



Sloboda

Ammunition 130 mm



**ROUND 130 mm
WITH
HIGH-EXPLOSIVE
PROJECTILE M79 AND
REDUCED VARIABLE
PROPELLANT CHARGE
M46**

Technical Data

Calibre (mm)	130
Projectile muzzle velocity (m/s)	705
Mean maximum pressure of powder gases (bar)	≤ 2648
Maximum range (m)	19000
Projectile length, with fuze (mm)	674
Projectile mass, tubular (kg)	33.4
Explosive charge mass (kg)	3.67
Cartridge case length (mm)	846
Cartridge case mass (kg)	11.35
Propellant charge mass (kg)	6.75
Operating temperature (°C)	-30 ÷ +50

The round 130 mm is separately loaded, with a high-explosive projectile M79 and a reduced variable propellant charge M46.

It is intended for destruction of personnel, light fortifications, unarmored and lightly armored vehicles, etc.

The projectile is assembled with TNT explosive.

A fuze UTIU M72B1 is screwed on the projectile and it can be adjusted to superquick or delay action.

The reduced variable propellant charge M46 is activated by a gun primer KT M71.

WEAPON COMPATIBILITY: 130 mm gun M46

**ROUND 130 mm
WITH
HIGH-EXPLOSIVE
PROJECTILE M93
WITH BASE-BLEED
AND FULL
PROPELLANT CHARGE
M93A**



Technical Data

The round 130 mm is separately loaded, with a high-explosive projectile M93 with base-bleed and a full propellant charge M93A.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles, etc.

The projectile is assembled with TNT explosive.

A fuze UTIU M72B1 is screwed on the projectile and it can be adjusted to superquick or delay action.

The full propellant charge M93A is activated by a gun primer KT M71.

Calibre (mm)	130
Projectile muzzle velocity (m/s)	885
Mean maximum pressure of powder gases (bar)	≤ 3080
Maximum range (m)	31100
Projectile length, with fuze (mm)	≈ 756
Projectile mass (kg)	36.95
Explosive charge mass (kg)	≈ 3.64
Cartridge case length (mm)	846
Cartridge case mass (kg)	11.35
Propellant charge mass (kg)	12.6
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 130 mm gun M46



Sloboda

Ammunition 152 mm



**ROUND 152 mm
WITH
HIGH-EXPLOSIVE
PROJECTILE M88
AND FULL VARIABLE
PROPELLANT CHARGE
M77**

Technical Data

NEW

Calibre (mm)	152
Projectile muzzle velocity (m/s)	655
Mean maximum pressure of powder gases (bar)	≤ 2305
Maximum range (m)	17400
Projectile length, with fuze (mm)	max 710
Projectile mass, tabular (kg)	43.56
Explosive charge mass (kg)	5.94
Cartridge case length (mm)	max 547.5
Cartridge case mass (kg)	7.5
Propellant charge mass (kg)	8.57
Operating temperature (°C)	-30 ÷ +50

The round 152 mm is separately loaded, with a high-explosive projectile M88 and a full variable propellant charge M77.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles, etc.

The projectile is assembled with TNT.

A fuze UTIU M72B1 is screwed on the projectile and it can be adjusted to instant or delay action,.

The full variable propellant charge M77 is activated by a gun primer KT M71.

WEAPON COMPATIBILITY: 152 mm gun-howitzer D-20 and 152 mm gun-howitzer M1937

ROUND 152 mm WITH HIGH-EXPLOSIVE PROJECTILE M88 AND REDUCED VARIABLE PROPELLANT CHARGE M77



NEW

The round 152 mm is separately loaded, with a high-explosive projectile M88 and a reduced variable propellant charge M77.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles, etc.

The projectile is assembled with TNT.

A fuze UTIU M72B1 is screwed on the projectile and it can be adjusted to instant or delay action,.

The reduced variable propellant charge M77 is activated by a gun primer KT M71.

Technical Data

Calibre (mm)	152
Projectile muzzle velocity (m/s)	511
Mean maximum pressure of powder gases (bar)	≤ 2059
Maximum range (m)	13400
Projectile length, with fuze (mm)	max 710
Projectile mass, tabular (kg)	43.56
Explosive charge mass (kg)	5.94
Cartridge case length (mm)	max 547.5
Cartridge case mass (kg)	7.5
Propellant charge mass (kg)	4.19
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 152 mm gun-howitzer D-20 and 152 mm gun-howitzer M1937



Sloboda

Ammunition 155 mm



**ROUND 155 mm
WITH
HIGH-EXPLOSIVE
PROJECTILE M107
AND PROPELLANT
CHARGE M3A1**

Technical Data

Calibre (mm)	155
Projectile muzzle velocity (m/s)	375 (M109/M126A1) 375 (M109A1/M185) 380 (M198/M199)
Mean maximum pressure of powder gases (bar)	≤ 1593 (M109/M126A1) ≤ 1062 (M109A1/M185)
Maximum range (m)	9803 (M109/M126A1) 9800 (M109A1/M185) 9800 (M198/M199)
Projectile length, with fuze (mm)	702
Projectile mass, tabular (kg)	43.1
Explosive charge mass (kg)	6.72
Propellant charge mass (kg)	2.68
Operating temperature (°C)	-30 ÷ +50

NEW

The round 155 mm is separate loaded, with a high-explosive projectile M107 and a propellant charge M3A1.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles, etc.

The projectile is filled with TNT explosive. A fuze UTIU M02P1 is screwed on the projectile and it can be set to superquick or delay action.

The propellant charge M3A1 is activated by a gun primer KT M82P2.

WEAPON COMPATIBILITY: 155 mm howitzers M109/M126A1, M109A1/M185 and M198/M199

ROUND 155 mm WITH HIGH-EXPLOSIVE PROJECTILE M107 AND PROPELLANT CHARGE M4A2



NEW

The round 155 mm is separate loaded, with a high-explosive projectile M107 and a propellant charge M4A2.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles, etc.

The projectile is filled with TNT explosive. A fuze UTIU M02P1 is screwed on the projectile and it can be set to superquick or delay action.

The propellant charge M4A2 is activated by a gun primer KT M82P2.

Technical Data

Calibre (mm)	155
Projectile muzzle velocity (m/s)	562 (M109/M126A1) 565 (M109A1/M185) 574 (M198/M199)
Mean maximum pressure of powder gases (bar)	≤ 2495 (M109/M126A1) ≤ 1730 (M109A1/M185)
Maximum range (m)	14600 (M109/M126A1) 14800 (M109A1/M185) 15030 (M198/M199)
Projectile length, with fuze (mm)	702
Projectile mass, tabular (kg)	43.1
Explosive charge mass (kg)	6.72
Propellant charge mass (kg)	6.4
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 155 mm howitzers M109/M126A1, M109A1/M185 and M198/M199



Sloboda

Ammunition 155 mm



**ROUND 155 mm
WITH
HIGH-EXPLOSIVE
PROJECTILE M107
AND PROPELLANT
CHARGE M119A1**

Technical Data

Calibre (mm)	155
Projectile muzzle velocity (m/s)	684 (M109A1/M185) 690 (M198/M199)
Mean maximum pressure of powder gases (bar)	≤ 2060 (M109A1/M185) ≤ 2170 (M198/M199)
Maximum range (m)	18100 (M109A1/M185) 18270 (M198/M199)
Projectile length, with fuze (mm)	702
Projectile mass, tabular (kg)	43.1
Explosive charge mass (kg)	6.72
Propellant charge mass (kg)	9
Operating temperature (°C)	-30 ÷ +50

NEW

The round 155 mm is separate loaded, with a high-explosive projectile M107 and a propellant charge M119A1.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles, etc.

The projectile is filled with TNT explosive. A fuze UTIU M02P1 is screwed on the projectile and it can be set to superquick or delay action.

The propellant charge M119A1 is activated by a gun primer KT M82P2.

WEAPON COMPATIBILITY: 155 mm M109A1/M185 and M198/M199 howitzers

ROUND 155 mm WITH PROJECTILE WP M110A2 AND PROPELLANT CHARGE M3A1



NEW

The round 155 mm is separate loaded, with a projectile WP M110A2 and a propellant charge M3A1.

It is intended to create smoke screen on the battlefield with white phosphorus.

The projectile is filled with white phosphorus.

A fuze UTIU M02P1 is screwed on the projectile and it can be set to superquick or delay action.

The propellant charge M3A1 is initiated by a gun primer KT M82P2.

Technical Data

Calibre (mm)	155
Projectile muzzle velocity (m/s)	374.9 (M109/M126A1) 374.9 (M109A1/M185) 380.1 (M198/M199)
Mean maximum pressure of powder gases (bar)	≤ 1593 (M109/M126A1) ≤ 1062 (M109A1/M185)
Maximum range (m)	9800 (M109/M126A1) 9800 (M109A1/M185) 9800 (M198/M199)
Projectile length, with fuze (mm)	702.5
Projectile mass, tabular (kg)	44.17
White phosphorus mass (kg)	7.1
Propellant charge mass (kg)	2.68
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 155 mm howitzers M109/M126A1, M109A1/M185 and M198/M199



Ammunition 155 mm



ROUND 155 mm
WITH PROJECTILE
WP M110A2
AND PROPELLANT
CHARGE M4A2

Technical Data

NEW

Calibre (mm)	155
Projectile muzzle velocity (m/s)	562.4 (M109/M126A1) 565.4 (M109A1/M185) 574.3 (M198/M199)
Mean maximum pressure of powder gases (bar)	≤ 2495 (M109/M126A1) ≤ 1730 (M109A1/M185)
Maximum range (m)	14600 (M109/M126A1) 14800 (M109A1/M185) 14800 (M198/M199)
Projectile length, with fuze (mm)	702.5
Projectile mass, tabular (kg)	44.17
White phosphorus mass (kg)	7.1
Propellant charge mass (kg)	6.4
Operating temperature (°C)	-30 ÷ +50

The round 155 mm is separate loaded, with a projectile WP M110A2 and a propellant charge M4A2.

It is intended to create smoke screen on the battlefield with white phosphorus.

The projectile is filled with white phosphorus.

A fuze UTIU M02P1 is screwed on the projectile and it can be set to superquick or delay action.

The propellant charge M4A2 is activated by a gun primer KT M82P2.

WEAPON COMPATIBILITY: 155 mm howitzers M109/M126A1, M109A1/M185 and M198/M199

ROUND 155 mm WITH PROJECTILE WP M110A2 AND PROPELLANT CHARGE M119A1



NEW

The round 155 mm is separate loaded, with a projectile WP M110A2 and a propellant charge M119A1.

It is intended to create smoke screen on the battlefield with white phosphorus.

The projectile is filled with white phosphorus.

A fuze UTIU M02P1 is screwed on the projectile and it can be set to superquick or delay action.

The propellant charge M119A1 is activated by a gun primer KT M82P2.

Technical Data

Calibre (mm)	155
Projectile muzzle velocity (m/s)	684 (M109A1/M185) 690 (M198/M199)
Mean maximum pressure of powder gases (bar)	≤ 2060 (M109A1/M185) ≤ 2170 (M198/M199)
Maximum range (m)	18100 (M109A1/M185) 18270 (M198/M199)
Projectile length, with fuze (mm)	702.5
Projectile mass, tabular (kg)	44.17
White phosphorus mass (kg)	7.1
Propellant charge mass (kg)	9
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 155 mm M109A1/M185 and M198/M199 howitzers



Ammunition 155 mm



ROUND 155 mm WITH ILLUMINATING PROJECTILE M485A2 AND PROPELLANT CHARGE M3A1

Technical Data

NEW

Calibre (mm)	155
Projectile muzzle velocity (m/s)	385 (M109/M126A1) 381.7 (M109A1/M185) 380.1 (M198/M199)
Mean maximum pressure of powder gases (bar)	≤ 1593 (M109/M126A1) ≤ 1062 (M109A1/M185)
Maximum range of illumination (m)	9000 (M109/M126A1) 9000 (M109A1/M185) 10300 (M198/M199)
Projectile length, with fuze (mm)	701
Projectile mass, tabular (kg)	41.8
Illuminating composition mass (kg)	2.63
Light intensity (cd)	1000000
Torch burning time (s)	≈ 120
Propellant charge mass (kg)	2.68
Operating temperature (°C)	-30 ÷ +50

The round 155 mm is separate loaded, with an illuminating projectile M485A2 and a propellant charge M3A1.

It is intended for illuminating the battlefield.

The projectile is assembled with an illuminating torch.

An electronic time fuze UTE M10 is screwed on the projectile and it is timed with UTIF device (setter) before firing the projectile.

The propellant charge M3A1 is initiated by a gun primer KT M82P2.

WEAPON COMPATIBILITY: 155 mm howitzers M109/M126A1, M109A1/M185 and M198/M199

ROUND 155 mm WITH ILLUMINATING PROJECTILE M485A2 AND PROPELLANT CHARGE M4A2



NEW

The round 155 mm is separate loaded, with an illuminating projectile M485A2 and a propellant charge M4A2.

It is intended for illuminating the battlefield.

The projectile is assembled with an illuminating torch.

An electronic time fuze UTE M10 is screwed on the projectile and it is timed with UTIF device (setter) before firing the projectile.

The propellant charge M4A2 is initiated by a gun primer KT M82P2.

Technical Data

Calibre (mm)	155
Projectile muzzle velocity (m/s)	576.5 (M109/M126A1) 576.5 (M109A1/M185) 574.3 (M198/M199)
Mean maximum pressure of powder gases (bar)	≤ 2495 (M109/M126A1) ≤ 1730 (M109A1/M185)
Maximum range of illumination (m)	14000 (M109/M126A1) 14000 (M109A1/M185) 14500 (M198/M199)
Projectile length, with fuze (mm)	701
Projectile mass, tabular (kg)	41.8
Illuminating composition mass (kg)	2.63
Light intensity (cd)	1000000
Torch burning time (s)	≈ 120
Propellant charge mass (kg)	6.4
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 155 mm howitzers M109/M126A1, M109A1/M185 and M198/M199



Ammunition 155 mm



ROUND 155 mm
WITH ILLUMINATING
PROJECTILE M485A2
AND PROPELLANT
CHARGE M119A1

Technical Data

NEW

Calibre (mm)	155
Projectile muzzle velocity (m/s)	697 (M109A1/M185) 684 (M198/M199)
Mean maximum pressure of powder gases (bar)	≤ 2060 (M109A1/M185) ≤ 2170 (M198/M199)
Maximum range (m)	17500 (M109A1/M185) 18400 (M198/M199)
Projectile length, with fuze (mm)	701
Projectile mass, tabular (kg)	41.8
Illuminating composition mass (kg)	2.63
Light intensity (cd)	1000000
Torch burning time (s)	≈ 120
Propellant charge mass (kg)	9
Operating temperature (°C)	-30 ÷ +50

The round 155 mm is separate loaded, with an illuminating projectile M485A2 and a propellant charge M119A1.

It is intended for illuminating the battlefield.

The projectile is assembled with an illuminating torch.

An electronic time fuze UTE M10 is screwed on the projectile and it is timed with UTIF device (setter) before firing the projectile.

The propellant charge M119A1 is initiated by a gun primer KT M82P2.

WEAPON COMPATIBILITY: 155 mm M109A1/M185 and M198/M199 howitzers

ROUND 155 mm WITH HIGH-EXPLOSIVE PROJECTILE M101 AND PROPELLANT CHARGE MC ZONE 9



NEW

The round 155 mm is separate loaded, with a high-explosive projectile M101 and a propellant charge MC zone 9.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles, etc.

The projectile is assembled with TNT.

A fuze UTIU M02P1 is screwed on the projectile and it can be set to superquick or delay action.

The propellant charge MC zone 9 is initiated by a gun primer KT M82P2.

Technical Data

Calibre (mm)	155
Projectile muzzle velocity (m/s)	840
Mean maximum pressure of powder gases (bar)	≤ 2500
Maximum range (m)	23000
Projectile length, with fuze (mm)	702
Projectile mass, tabular (kg)	43.25
Explosive charge mass (kg)	6.9
Propellant charge mass (kg)	14
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 155 mm self-propelled gun-howitzer NORA-B52 M15



Ammunition 155 mm



**ROUND 155 mm
WITH
HIGH-EXPLOSIVE
PROJECTILE M107
AND PROPELLANT
CHARGE MC ZONE 8**

Technical Data

Calibre (mm)	155
Projectile muzzle velocity (m/s)	690
Mean maximum pressure of powder gases (bar)	≤ 1900
Maximum range (m)	18400
Projectile length, with fuze (mm)	702
Projectile mass, tabular (kg)	43.1
Explosive charge mass (kg)	6.72
Propellant charge mass (kg)	9.4
Operating temperature (°C)	-30 ÷ +50

The round 155 mm is separate loaded, with a high-explosive projectile M107 and a propellant charge MC zone 8.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles, etc.

The projectile is assembled with TNT.

A fuze UTIU M02P1 is screwed on the projectile and it can be set to superquick or delay action.

The propellant charge MC zone 8 is initiated by a gun primer KT M82P2.

WEAPON COMPATIBILITY: 155 mm self-propelled gun-howitzer NORA-B52 M15

ROUND 155 mm WITH PROJECTILE HEER-BT M19 AND PROPELLANT CHARGE MC ZONE 9



NEW

The round 155 mm is separate loaded, with a high-explosive extended range projectile M19 with boat tail and a propellant charge MC zone 9.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles, etc.

The projectile is assembled with TNT.

A fuze UTIU M02P1 is screwed on the projectile and it can be set to superquick or delay action.

The propellant charge MC zone 9 is initiated by a gun primer KT M82P2.

Technical Data

Calibre (mm)	155
Projectile muzzle velocity (m/s)	840
Mean maximum pressure of powder gases (bar)	≤ 2700
Maximum range (m)	25600
Projectile length, with fuze (mm)	937.28
Projectile mass, tabular (kg)	43.8
Explosive charge mass (kg)	9.7
Propellant charge mass (kg)	14
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 155 mm self-propelled gun-howitzer NORA-B52 M15



Sloboda

Ammunition 155 mm



**ROUND 155 mm
WITH PROJECTILE
HEER-BT M19
AND PROPELLANT
CHARGE MC ZONE 10**

Technical Data

Calibre (mm)	155
Projectile muzzle velocity (m/s)	930
Mean maximum pressure of powder gases (bar)	≤ 3300
Maximum range (m)	29000
Projectile length, with fuze (mm)	937.28
Projectile mass, tabular (kg)	43.8
Explosive charge mass (kg)	9.7
Propellant charge mass (kg)	17
Operating temperature (°C)	-30 ÷ +50

NEW

The round 155 mm is separate loaded, with a high-explosive extended range projectile M19 with boat tail and a propellant charge MC zone 10.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles, etc.

The projectile is assembled with TNT.

A fuze UTIU M02P1 is screwed on the projectile and it can be set to superquick or delay action.

The propellant charge MC zone 10 is initiated by a gun primer KT M82P2.

WEAPON COMPATIBILITY: 155 mm self-propelled gun-howitzer NORA-B52 M15

ROUND 155 mm WITH PROJECTILE HEER-BB M19 AND PROPELLANT CHARGE MC ZONE 9



NEW

The round 155 mm is separate loaded, with a high-explosive extended range projectile with base-bleed mechanism M19 and a propellant charge MC zone 9.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles, etc.

The projectile is assembled with TNT.

A fuze UTIU M02P1 is screwed on the projectile and it can be set to superquick or delay action.

The propellant charge MC zone 9 is initiated by a gun primer KT M82P2.

Technical Data

Calibre (mm)	155
Projectile muzzle velocity (m/s)	825
Mean maximum pressure of powder gases (bar)	≤ 2700
Maximum range (m)	31000
Projectile length, with fuze (mm)	937.28
Projectile mass, tabular (kg)	47.1
Explosive charge mass (kg)	9.7
Propellant charge mass (kg)	14
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 155 mm self-propelled gun-howitzer NORA-B52 M15



Sloboda

Ammunition 155 mm



**ROUND 155 mm
WITH PROJECTILE
HEER-BB M19
AND PROPELLANT
CHARGE MC ZONE 10**

Technical Data

Calibre (mm)	155
Projectile muzzle velocity (m/s)	925
Mean maximum pressure of powder gases (bar)	≤ 3300
Maximum range (m)	38000
Projectile length, with fuze (mm)	937.28
Projectile mass, tabular (kg)	47.1
Explosive charge mass (kg)	9.7
Propellant charge mass (kg)	17
Operating temperature (°C)	-30 ÷ +50

NEW

The round 155 mm is separate loaded, with a high-explosive extended range projectile with base-bleed mechanism M19 and a propellant charge MC zone 10.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles, etc.

The projectile is assembled with TNT.

A fuze UTIU M02P1 is screwed on the projectile and it can be set to superquick or delay action.

The propellant charge MC zone 10 is initiated by a gun primer KT M82P2.

WEAPON COMPATIBILITY: 155 mm self-propelled gun-howitzer NORA-B52 M15

ROUND 155 mm WITH PROJECTILE HE ERFB M03 AND PROPELLANT CHARGE MC ZONE 9



The round 155 mm is separate loaded, with a high-explosive extended range projectile M03 with boat tail and a propellant charge MC zone 9.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles, etc.

The projectile is assembled with TNT.

A fuze UTIU M02P1 is screwed on the projectile and it can be set to superquick or delay action.

The propellant charge MC zone 9 is initiated by a gun primer KT M82P2.

Technical Data

Calibre (mm)	155
Projectile muzzle velocity (m/s)	820
Mean maximum pressure of powder gases (bar)	≤ 2700
Maximum range (m)	26600
Projectile length, with fuze (mm)	937.28
Projectile mass, tabular (kg)	45.5
Explosive charge mass (kg)	8.1
Propellant charge mass (kg)	14
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 155 mm self-propelled gun-howitzer NORA-B52 M15



Sloboda

Ammunition 155 mm



**ROUND 155 mm
WITH PROJECTILE
HE ERFB M03 AND
PROPELLANT CHARGE
MC ZONE 10**

Technical Data

Calibre (mm)	155
Projectile muzzle velocity (m/s)	920
Mean maximum pressure of powder gases (bar)	≤ 2700
Maximum range (m)	32200
Projectile length, with fuze (mm)	937.28
Projectile mass, tabular (kg)	45.5
Explosive charge mass (kg)	8.1
Propellant charge mass (kg)	17
Operating temperature (°C)	-30 ÷ +50

The round 155 mm is separate loaded, with a high-explosive extended range projectile M03 with boat tail and a propellant charge MC zone 10.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles, etc.

The projectile is assembled with TNT.

A fuze UTIU M02P1 is screwed on the projectile and it can be set to superquick or delay action.

The propellant charge MC zone 10 is initiated by a gun primer KT M82P2.

WEAPON COMPATIBILITY: 155 mm self-propelled gun-howitzer NORA-B52 M15

ROUND 155 mm WITH PROJECTILE HE ERFB-BB M03 AND PROPELLANT CHARGE MC ZONE 9



NEW

The round 155 mm is separate loaded, with a high-explosive extended range projectile with base-bleed mechanism M03 and a propellant charge MC zone 9.

It is intended for the destruction of personnel, light fortifications, unarmored and light-armored vehicles, etc.

The projectile is assembled with TNT.

A fuze UTIU M02P1 is screwed on the projectile and it can be set to superquick or delay action.

The propellant charge MC zone 9 is initiated by a gun primer KT M82P2.

Technical Data

Calibre (mm)	155
Projectile muzzle velocity (m/s)	820
Mean maximum pressure of powder gases (bar)	≤ 2700
Maximum range (m)	31600
Projectile length, with fuze (mm)	937.28
Projectile mass, tabular (kg)	47.6
Explosive charge mass (kg)	8.1
Propellant charge mass (kg)	14
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 155 mm self-propelled gun-howitzer NORA-B52 M15



Sloboda

Ammunition 155 mm



**ROUND 155 mm
WITH PROJECTILE
HE ERFB-BB M03 AND
PROPELLANT CHARGE
MC ZONE 10**

Technical Data

Calibre (mm)	155
Projectile muzzle velocity (m/s)	925
Mean maximum pressure of powder gases (bar)	≤ 3300
Maximum range (m)	41000
Projectile length, with fuze (mm)	937.28
Projectile mass, tabular (kg)	47.6
Explosive charge mass (kg)	8.1
Propellant charge mass (kg)	17
Operating temperature (°C)	-30 ÷ +50

The round 155 mm is separate loaded, with a high-explosive extended range projectile with base-bleed mechanism M03 and a propellant charge MC zone 10.

It is intended for the destruction of personnel, light fortifications, unarmored and lightly armored vehicles, etc.

The projectile is assembled with TNT.

A fuze UTIU M02P1 is screwed on the projectile and it can be set to superquick or delay action.

The propellant charge MC zone 10 is initiated by a gun primer KT M82P2.

WEAPON COMPATIBILITY: 155 mm self-propelled gun-howitzer NORA-B52 M15

ROUND 155 mm WITH PROJECTILE ERFB SMOKE (WP) M09 AND PROPELLANT CHARGE MC ZONE 9



Technical Data

The round 155 mm is separate loaded, with an extended range projectile WP M09 and a propellant charge MC zone 9.

It is intended for creating smoke screen on the battlefield with white phosphorus.

The projectile is filled with white phosphorus.

A fuze UTIU M02 is screwed on the projectile and it can be set to superquick or delay action.

The propellant charge MC zone 9 is initiated by a gun primer KT M82P2.

Calibre (mm)	155
Projectile muzzle velocity (m/s)	820
Mean maximum pressure of powder gases (bar)	≤ 2700
Maximum range (m)	26600
Projectile length, with fuze (mm)	937.28
Projectile mass, tabular (kg)	45.5
White phosphorus mass (kg)	8.7
Propellant charge mass (kg)	14
Operating temperature (°C)	-30 ÷ +50

WEAPON COMPATIBILITY: 155 mm self-propelled gun-howitzer NORA-B52 M15



Sloboda

Ammunition 155 mm



**ROUND 155 mm
WITH
PROJECTILE ERFB
SMOKE (WP) M09
AND PROPELLANT
CHARGE MC ZONE 10**

Technical Data

Calibre (mm)	155
Projectile muzzle velocity (m/s)	920
Mean maximum pressure of powder gases (bar)	≤ 3300
Maximum range (m)	32200
Projectile length, with fuze (mm)	937.28
Projectile mass, tabular (kg)	45.5
White phosphorus mass (kg)	8.7
Propellant charge mass (kg)	17
Operating temperature (°C)	-30 ÷ +50

The round 155 mm is separate loaded, with an extended range projectile WP M09 and a propellant charge MC zone 10. It is intended for creating smoke screen on the battlefield with white phosphorus.

The projectile is filled with white phosphorus.

A fuze UTIU M02 is screwed on the projectile and it can be set to superquick or delay action.

The propellant charge MC zone 10 is initiated by a gun primer KT M82P2.

WEAPON COMPATIBILITY: 155 mm self-propelled gun-howitzer NORA-B52 M15

FUZE UTI M68P1



The fuze UTI M68P1 is superquick-inertia fuze.

It is intended for the assembling the HE projectiles in caliber 76 mm.

The fuze with cap is safe for firing in snow and rain.

It is safe in all conditions of transportation and handling.

Technical Data

Action type	superquick
Total height of fuze (mm)	≈ 102.4
Depth of fuze intrusion (mm)	max 56.55
Muzzle safety (m)	min 10
Ready to act - armed (m)	max 140
Safety - mechanical, centrifugal, pyrotechnic (ms)	100 ÷ 200
Arming during axial acceleration (m/s ²)	24000 ÷ 230000
Rotation (min ⁻¹)	min 3100
Fuze mass (kg)	0.358
Operating temperature (°C)	-30 ÷ +50



Fuzes



FUZE UTIU M72B1

Technical Data

Action type (setting)	superquick, delay
Total height of fuze (mm)	max 105.71
Depth of fuze intrusion (mm)	max 46.8
Delay time - delay action (ms)	20 ÷ 50
Muzzle safety (m)	min 10
Ready to act - armed (m)	max 200
Safety - mechanical, centrifugal, pyrotechnic (ms)	100 ÷ 200
Arming during axial acceleration (m/s ²)	24000 ÷ 230000
Rotation (min ⁻¹)	min 3100
Muzzle velocity (m/s)	max 1100
Fuze mass (kg)	0.42
Operating temperature (°C)	-30 ÷ +50

The fuze UTIU M72B1 is mechanical, point-detonating fuze located at the nose, with superquick, inertia and delay action.

It is intended for the assembling the HE projectiles in calibers 85 mm, 100 mm, 122 mm, 130 mm and 152 mm for guns and howitzers.

It can be set at superquick and delay action.

The fuze with cap is safe for firing in snow and rain.

It is safe in all conditions of transportation and handling.

FUZE UTIU M72B2



NEW

The fuze UTIU M72B2 is mechanical, point-detonating fuze located at the nose, with superquick, inertia and delay action.

It is intended for the assembling the HE projectiles in calibers 85 mm, 100 mm, 122 mm, 130 mm and 152 mm for guns and howitzers.

It can be set at superquick and delay action.

The fuze with cap is safe for firing in snow and rain.

It is safe in all conditions of transportation and handling.

Technical Data

Action type (setting)	superquick, delay
Total height of fuze (mm)	max 105.71
Depth of fuze intrusion (mm)	max 46.8
Delay time - delay action (ms)	20 ÷ 50
Muzzle safety (m)	min 50
Ready to act - armed (m)	max 300
Safety - mechanical, centrifugal, pyrotechnic (ms)	200 ÷ 250
Arming during axial acceleration (m/s ²)	24000 ÷ 230000
Rotation (min ⁻¹)	min 3100
Muzzle velocity (m/s)	max 1100
Fuze mass (kg)	0.42
Operating temperature (°C)	-30 ÷ +50



Fuzes



FUZE UTIU M72B3

Technical Data

NEW

Action type (setting)	superquick, delay
Total height of fuze (mm)	max 105.71
Depth of fuze intrusion (mm)	max 46.8
Delay time - delay action (ms)	20 ÷ 50
Muzzle safety (m)	min 10
Ready to act - armed (m)	max 200
Safety - mechanical, centrifugal, pyrotechnic (ms)	100 ÷ 200
Arming during axial acceleration (m/s ²)	24000 ÷ 230000
Rotation (min ⁻¹)	min 3100
Muzzle velocity (m/s)	max 1100
Fuze mass (kg)	0.42
Operating temperature (°C)	-30 ÷ +50

The fuze UTIU M72B3 is mechanical, point-detonating fuze located at the nose, with superquick, inertia and delay action.

It is intended for the assembling the HE projectiles with and without base-bleed in calibers 85 mm, 100 mm, 122 mm, 130 mm and 152 mm for guns and howitzers.

It can be set at superquick and delay action.

The fuze with cap is safe for firing in snow and rain.

It is safe in all conditions of transportation and handling.

FUZE UTIU M85P1



Technical Data

The fuze UTIU M85P1 is mechanical, point-detonating fuze located at the nose, with superquick, inertia and delay action.

It is intended for the assembling the HE non-rotating projectiles in calibers 100 mm, 115 mm and 125 mm for 100 mm antitank guns T-12 or MT-12 and for tank guns 115 mm or 125 mm D-81.

It can be set at superquick and delay action.

The fuze with cap is safe for firing in snow and rain.

It is safe in all conditions of transportation and handling.

Action type (setting)	superquick, delay
Total height of fuze (mm)	max 105.71
Depth of fuze intrusion (mm)	max 46.8
Delay time - delay action (ms)	27 ÷ 55
Muzzle safety (m)	min 10
Ready to act - armed (m)	max 100
Safety - mechanical, pyrotechnic (ms)	100 ÷ 200
Arming during axial acceleration (m/s ²)	min 30000 to max 230000
Fuze mass (kg)	0.41
Operating temperature (°C)	-30 ÷ +50



Fuzes



FUZE UTIU M02

Technical Data

Action type (setting)	superquick, delay
Total height of fuze (mm)	max 153.33
Depth of fuze intrusion (mm)	max 56.13
Delay time - delay action (ms)	20 ÷ 50
Muzzle safety (m)	min 40
Ready to act - armed (m)	max 150
Safety - mechanical, centrifugal, pyrotechnic (ms)	100 ÷ 200
Arming during axial acceleration (m/s ²)	24000 ÷ 230000
Rotation (min ⁻¹)	min 3100
Fuze mass (kg)	0.57
Operating temperature (°C)	-30 ÷ +50

The fuze UTIU M02, with superquick, inertia and delay action, is mechanical, point-detonating fuze located at the nose.

It is intended for the assembling HE projectiles 105 mm HE ER M02 and 105 mm HE ER-BB M02.

It can be set at superquick and delay action.

The fuze is safe for firing in rain and snow.

It is safe in all conditions of transportation and handling.

FUZE UTIU M02P1



The fuze UTIU M02P1, with superquick, inertia and delay action, is mechanical, point detonating fuze located at the nose.

It is intended for the assembling the HE projectiles with and without base-bleed in calibers 105 mm, 122 mm (with special adapter) and 155 mm for guns and howitzers.

It can be set at superquick and delay action.

The fuze is safe for firing in rain and snow.

It is safe in all conditions of transportation and handling.

Technical Data

Action type (setting)	superquick, delay
Total height of fuze (mm)	max 153.33
Depth of fuze intrusion (mm)	max 56.13
Delay time - delay action (ms)	20 ÷ 50
Muzzle safety (m)	min 10
Ready to act - armed (m)	max 200
Safety - mechanical, centrifugal, pyrotechnic (ms)	100 ÷ 200
Arming during axial acceleration (m/s^2)	24000 ÷ 230000
Rotation (min^{-1})	min 3100
Fuze mass (kg)	0.81
Operating temperature ($^{\circ}C$)	-30 ÷ +50



FUZE UT-PE M69

Technical Data

Action type	superquick
Total fuze height (mm)	max 101.36
Depth of fuze intrusion (mm)	max 44.38
Muzzle safety (m)	min 2.5
Ready to act - armed (m)	40
Axial acceleration (m/s ²)	max 250000
Fuze mass (kg)	0.191
Operating temperature (°C)	-30 ÷ +50


The fuze UT-PE M69 is located at the nose and it is impact piezoelectric fuze with superquick action.

It is intended for assembling projectiles HEAT Shell 90 mm M74, 100 mm M69 and 100 mm M88.

The fuze has an interrupted explosive train and the electrical detonator in short circuit.

It is safe in all conditions of transportation and handling.

FUZE UT-PE M87P1

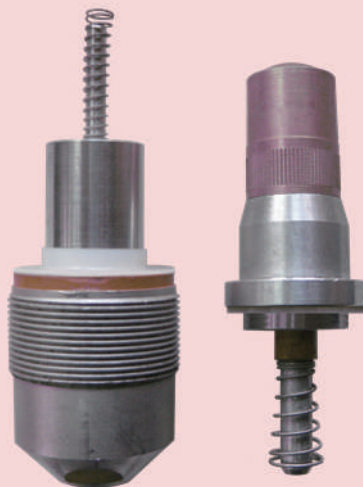

Technical Data

The fuze UT-PE M87P1 is superquick and piezoelectric.

It is intended for assembling the HEAT projectiles of calibers 100 mm, 122 mm and 125 mm, firing from antitank gun 100 mm T-12, howitzer 122 mm D-30, self-propelled howitzer 122 mm 2S1 and tank gun 125 mm D-81.

The fuze is bipartite, impact and it has superquick action.

It consists of an upper and a lower fuze.

The fuze is safe in all conditions of transportation, storage and handling.

Action type	superquick
Muzzle safety (m)	min 2.5
Ready to act - armed (m)	20
Arming during axial acceleration (m/s ²)	min 36000
Upper fuze (piezoelectric generator) mass (g)	85
Lower fuze mass (g)	170
Operating temperature (°C)	-30 ÷ +50



Fuzes



FUZE UTE M03

Technical Data

Action type	timing, secondary contact	
Time setting, with button and display (s)	3.2 ÷ 199.9 (pitch of 0.1, accuracy of ± 0.05)	
Total fuze height (mm)	max 134.1	
Depth of fuze intrusion (mm)	max 38.2	
Muzzle safety (m)	mechanical:	min 400 calibers
	electronic:	min 3 s per firing
Arming during axial acceleration (m/s ²)	24000 ÷ 250000	
Rotation (min ⁻¹)	2000 ÷ 25000	
Muzzle velocity (m/s)	max 1100	
Fuze mass (kg)	0.6	
Operating temperature (°C)	-30 ÷ +50	

The fuze UTE M03 is intended for assembling artillery projectiles 105 mm and 155 mm of special purpose (illuminating, smoke with HC containers, propaganda, etc) with 2"-12UNS-1A thread, for howitzers in calibers 105 mm and 155 mm.

The fuze is electronic and it is located at the nose.

It possesses timing function as well as secondary contact function.

The time is set with a button and is shown on the display.

The fuze is protected from intended and unintended electromagnetic interferences.

It is safe in all conditions of transportation, storage and usage.

FUZE UTE M03A1



NEW

The fuze UTE M03A1 is intended for assembling 105 mm and 155 mm timed artillery projectiles (high-explosive, smoke with white phosphorus, etc) with 2"-12UNS-1A thread.

The fuze is electronic and it is located at the nose.

It possesses timing function as well as secondary contact function.

The time is set with a button and it is shown on the display.

The fuze is protected from intended and unintended eletromagnetic interferences.

It is safe in all conditions of transportation, storage and usage.

Technical Data

Action type		timing, secondary contact
Time setting, with button and display (s)		3.2 ÷ 199.9 (pitch of 0.1, accuracy of ± 0.05)
Total fuze height (mm)		max 152.03
Depth of fuze intrusion (mm)		max 56.13
Muzzle safety (m)	mechanical:	min 400 calibers
	electronic:	min 3 s per firing
Arming during axial acceleration (m/s ²)		24000 ÷ 250000
Rotation (min ⁻¹)		2000 ÷ 25000
Muzzle velocity (m/s)		max 1100
Fuze mass (kg)		0.65
Operating temperature (°C)		-30 ÷ +50



Fuzes



FUZE UTE M10

Technical Data

NEW

Action type	timing, secondary contact	
Time setting, with setter (s)	3.2 ÷ 199.9 (pitch of 0.1, accuracy of ± 0.05)	
Total fuze height (mm)	max 133.7	
Depth of fuze intrusion (mm)	max 38.2	
Muzzle safety (m)	mechanical:	min 400 calibers
	electronic:	min 3 s per firing
Arming during axial acceleration (m/s ²)	20000 ÷ 250000	
Rotation (min ⁻¹)	2000 ÷ 25000	
Fuze mass (kg)	0.77	
Operating temperature (°C)	-30 ÷ +50	

The fuze UTE M10 is intended for assembling artillery projectiles 105 mm and 155 mm of special purpose (illuminating, smoke with HC containers, propaganda, etc) with 2"-12UNS-1A thread, for howitzers in calibers 105 mm and 155 mm.

The fuze is electronic and it is located at the nose.

It possesses timing function as well as secondary contact function.

The time setting is wireless, with setter (device for time setting and function selection).

The fuze is protected from intended and unintended eletromagnetic interferences. It is safe in all conditions of transportation, storage and usage.

FUZE UTE M10A1



NEW

The fuze UTE M10A1 is intended for assembling artillery timed projectiles (high-explosive, smoke, etc) with a 2"-12UNS-1A thread, for all calibers from 76 to 203 mm.

The fuze is electronic and it is located at the nose.

It possesses time function as well as secondary contact function.

The time setting is wireless with setter (device for time setting and function selection).

The fuze is protected from intended and unintended eletromagnetic interferences.

It is safe in all conditions of transportation, storage and usage.

Technical Data

Action type		timing, secondary contact
Time setting, with setter (s)		3.2 ÷ 199.9 (pitch of 0.1, accuracy of ± 0.05)
Total fuze height (mm)		max 151.6
Depth of fuze intrusion (mm)		max 56.1
Muzzle safety (m)	mechanical:	min 400 calibers
	electronic:	min 3 s per firing
Arming during axial acceleration (m/s ²)		20000 ÷ 250000
Rotation (min ⁻¹)		2000 ÷ 25000
Fuze mass (kg)		0.82
Operating temperature (°C)		-30 ÷ +50



Fuzes



FUZE UB M16

Technical Data

NEW

Action type		proximity, secondary contact
Height of proximity action (m)		10 ± 8
Total fuze height (mm)		max 151.6
Depth of fuze intrusion (mm)		max 56.1
Muzzle safety (m)	mechanical:	min 400 calibers
	electronic:	blocking action
Arming during axial acceleration (m/s ²)		20000 ÷ 250000
Rotation (min ⁻¹)		2000 ÷ 25000
Muzzle velocity (m/s)		max 1100
Fuze mass (kg)		0.825
Operating temperature (°C)		-30 ÷ +50

The fuze UB M16 is electronic and it is located at the nose.

It possesses proximity function as well as secondary contact-superquick function.

It is intended for assembling artillery high-explosive projectiles from 105 to 155 mm with 2"-12UNS-1A thread.

The proximity action is based on the Doppler effect of radio waves.

The fuze possesses blocking function (active during the last 2.5 seconds of flight).

The flight duration is given with setter (device for time setting and function selection).

The fuze has possibility of setting up levels of sensitivity for the proximity function with the setter.

The fuze is protected from intended and unintended eletromagnetic interferences.

It is safe in all transportation conditions as well as in all conditions of storage and use.

FUZE UMF M16



NEW

The fuze UMF M16 is electronic and it is located at the nose.

It is multifunctional and has possibility of selecting proximity, timing or superquick action.

It is intended for assembling artillery high-explosive projectiles of calibers from 105 to 155 mm with 2"-12UNS-1A thread.

The selection of fuze action is wireless, with the setting device (setter).

The default setting of the fuze is with proximity action (based on the Doppler effect of radio waves).

The fuze also possesses a blocking action (it is active during the last 2.5 s of flight).

The flight duration is given with the setter.

The fuze has a possibility of setting up levels of sensitivity for the proximity function with the setter.

The fuze is protected from intended and unintended eletromagnetic interferences.

It is safe in all transportation conditions as well as in all conditions of storage and use.

Technical Data

Action type		proximity, timing, superquick impact
Function (action) selection		with setter
Total fuze height (mm)		max 151.6
Depth of fuze intrusion (mm)		max 56.1
Muzzle safety (m)	mechanical:	min 400 calibers
	electronic:	min 3 s per firing
Arming during axial acceleration (m/s ²)		20000 ÷ 250000
Rotation (min ⁻¹)		2000 ÷ 25000
Muzzle velocity (m/s)		max 1100
Height of proximity action (m)		10 ± 8
Time setting, with setting device (s)		3.2 ÷ 199.9 (pitch of 0.1, accuracy of ± 0.05)
Fuze mass (kg)		0.825
Operating temperature (°C)		-30 ÷ +50



Fuze setting devices



UTIF

Technical Data

Function selection	proximity, time, superquick impact
Entering/reading	wireless
Indication of proper entering/reading	light and sound
Indication of improper entering/reading	light and sound
Power supply	battery of primary type
Nominal battery voltage (V)	3.6
Capacity (Ah)	5.8 (1000 cycles of entering)
Time setting, using device (s)	3.2 ÷ 199.9 (pitch of 0.1, accuracy of ± 0.05)
Device mass (kg)	0,6
Operating temperature (°C)	-30 ÷ +50

NEW

The UTIF is an autonomous electronic device intended for time setting and function selection of electronic fuzes UMF M16, UB M16, UTE M10A1 and UTE M10.

It provides:

- selection and display of function (proximity, time, superquick) and last entered time,
- selection and display of time setting when the time function of fuze is selected,
- wireless entering of the selected data in the fuze,
- wireless reading of the entered data from the fuze.

GUN PRIMER KT M28A2



The gun primer KT M28A2 is intended for initiating the propellant charge M2 assembled into the cartridge case 105 mm M14 and is used for 105 mm HE M1, 105 mm WP M60 and 105 mm ILL M314A4 rounds.

The gun primer is made of brass, with holes for igniting the propellant charge (black powder N°1).

It is activated by the strike of the firing pin.

The gun primer is airtight and safe in all conditions of transportation, storage and usage.

Technical Data

Primer type	percussion, mechanical
Minimum conditions for action (J)	1.121
Mean working pressure of powder gases (bar)	2305
Gun primer height (mm)	max 260.6
Primer rim diameter (mm)	Ø15.75
Primer diameter, where it is pressed into the cartridge case (mm)	Ø14.071
Powder	black powder N°1
Powder mass (g)	19.4
Primer mass (g)	140
Operating temperature (°C)	-30 ÷ +50



Gun primers



GUN PRIMER KT M28P1

Technical Data

NEW

Primer type	percussion, mechanical
Minimal conditions for action (J)	1.121
Mean operating pressure of powder gases (bar)	2305
Primer height (mm)	max 260.6
Diameter of primer rim (mm)	Ø20
Thread	SpW 5/8" - 18 2A
Powder	black powder N°1
Powder mass (g)	19.4
Primer mass (g)	140
Operating temperature (°C)	-30 ÷ +50

The gun primer KT M28P1 is intended for initiating the propellant charge M2 assembled in the cartridge case 105 mm M10 (cartridge case 105 mm M14 with thread) and is used with the round 105 mm HE M1, 105 mm WP M60 and 105 mm ILL M314A4.

It is made of brass with holes for initiating the propellant charge (black powder N°1). The primer is activated by the strike of the firing pin.

The primer is airtight and safe in any type of transportation, storage and usage.

GUN PRIMER KT M71



The gun primer KT M71 is intended for initiating the propellant charge of ammunition in calibers:

- 57 mm, for anti-aircraft gun S-60,
- 76 mm, for mountain gun M48 B-1 and gun M42 (ZIS-3),
- 85 mm, for anti-aircraft gun M39/42 or M39/44,
- 100 mm, for gun D-10 and anti-tank gun T-12,
- 122 mm, for howitzer D-30 and M38,
- 130 mm, for gun M46,
- 152 mm, for gun-howitzer D-20 and M37.


The primer is airtight and safe in all conditions of transportation, storage and use.

Technical Data

Primer type	percussion
Minimal conditions for action - impact energy (J)	2.065
Primer height (mm)	max 23.9
Primer diameter (mm)	max Ø30
Thread	SpW 27.178 x 14 pitches
Powder	black powder N°7
Powder mass (g)	2
Primer mass (g)	85
Operating temperature (°C)	-30 ÷ +50



Gun primers

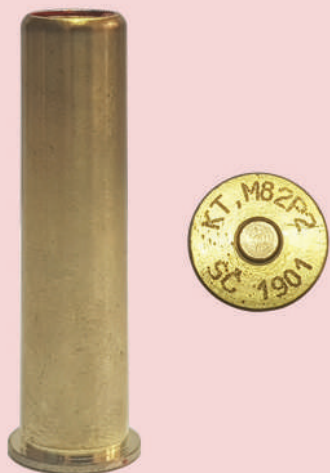

GUN PRIMER KT M82P2

Technical Data

Primer type	percussion, mechanical
Minimum energy needed for activation (J)	1.04
Maximum energy needed for non-activation (J)	0.29
Maximum pressure of powder gasses (bar)	< 3500
Primer height (mm)	max 49.8
Primer diameter (mm)	Ø15.15
Powder	black powder N°7
Powder mass (g)	1.4
Primer mass (g)	33
Operating temperature (°C)	-30 ÷ +50

The gun primer KT M82P2 is intended for assembling 155 mm ammunition, without the cartridge case, for self-propelled gun-howitzer NORA-B52 M15 and for initiating the propellant charge, as well as for other 155 mm arms.

The primer is made of brass.

Before the firing, it is placed into the firing mechanism's stock in the breech block out of which it is, during the firing, automatically driven into the primer bearing, in which the ignition of the primer is being performed.

The primer is activated by the strike of the firing pin.

It is water-resistant and safe in all conditions of transportation, storage and usage.

GUN PRIMER KT-EU M84



The gun primer KT-EU M84 is electro-percussion and it is intended for initiating of base propellant charge M88 which is introduced into the ammunition 125 mm for 125 mm gun on the tank M84 or T-72.

The gun primer is airtight and safe in all conditions of transportation, storage and usage.

Technical Data

Primer type	electro-percussion
Minimum conditions for action - impact energy (J)	2.1
Voltage and time of action of the current pulse (V/s)	20/0.004
Electrical resistance of the circuit (Ω)	$1 \div 3.6$
Primer height (mm)	max 24
Primer diameter (mm)	max $\varnothing 30$
Thread (mm)	SpW 27.178 x 14 pitches
Powder	black powder N°7
Powder mass (g)	1.35
Primer mass (g)	85
Operating temperature ($^{\circ}\text{C}$)	$-30 \div +50$



Gun primers



GUN PRIMER
KT M1

Technical Data

NEW

Primer type	percussion, mechanical
Minimal conditions for action (J)	1.121
Primer height (mm)	max 94.24
Diameter of primer rim (mm)	Ø15.75
Primer diameter, where it is pressed into the cartridge case (mm)	Ø14.071
Powder	black powder N°1
Powder mass (g)	6.3
Primer mass (g)	69
Operating temperature (°C)	-30 ÷ +50

The gun primer KT M1 is intended for initiating the propellant charge BLANK (SALUTE) assembled in the cartridge case 105 mm SALUTE and is used with 105 mm BLANK (SALUTE) rounds.

It is also intended for assembling the ammunition for antiaircraft guns 40 mm.

The primer is made of brass, with holes for igniting the powder charge (black powder N°1).

It is activated by the strike of the firing pin.

The primer is airtight and safe in all conditions of transportation, storage and usage.

GUN PRIMER KT M02



The gun primer KT M02 is intended for initiating the variable propellant charge M15 and the full propellant charge M15 assembled in the cartridge case 105 mm M14 and is used for 105 mm HE ER-BT M15 round and 105 mm HE ER-BB M15 round.

It is made of brass, with holes for igniting the propellant charge (black powder N°1).

It is assembled by pressing into the cartridge case 105 mm M14.

It is activated by the strike of the firing pin.

The gun primer is airtight and safe in all conditions of transportation, storage and usage.

Technical Data

Primer type	percussion, mechanical
Minimum conditions for action (J)	1.121
Mean working pressure of powder gases (bar)	2650
Primer height (mm)	max 290
Primer rim diameter (mm)	Ø15.75
Primer diameter, where it is pressed into the cartridge case (mm)	Ø14.071
Powder	black powder N°1
Powder mass (g)	23.6
Primer mass (g)	155
Operating temperature (°C)	-30 ÷ +50

PRODUCTION PROGRAM

Antiaircraft ammunition cal. 20 mm, 23 mm, 30 mm, 37 mm, 40 mm and 57 mm
Aircraft ammunition cal. 23 mm, 30 mm and 40 mm
Ammunition for automatic grenade launcher 30 mm
Ammunition 40 mm for underbarrel grenade launcher 40 mm type GP-25 and GP-30
Ammunition 40 mm x 46 for grenade launcher type M79, M203 and others
Signal ammunition 26 mm and 38 mm
Special police program (ammunition 26.5 mm, 38 mm and grenades 40 mm, 45 mm, 53 mm, 81 mm, 82 mm)
Rifle grenades cal. 30 mm, 40 mm, 60 mm (with and without bullet trap)
Rocket antiarmour weapon cal. 64 mm, 90 mm and 120 mm
Artillery and tank ammunition cal. 76 mm, 100 mm, 105 mm, 122 mm, 125 mm, 130 mm, 152 mm and 155 mm
Fuzes for ammunition from the production program and for ammunition overhauling
Proximity fuzes for antiaircraft and artillery ammunition and time fuzes for artillery ammunition
Gun primers for ammunition from our production program and for purposes of ammunition overhauling
Practice ammunition
Overhauling of all devices from armament and military equipment production program
Manufacture of wooden and plastics packaging
Technology transfer



BASIC INFORMATION

The adopted establishment date of Kompanija "Sloboda" AD is October 6, 1948. The official production started in November 1949.

The company majority shareholder is the Republic of Serbia. Central office and the main production capacities of the factory are situated in Cacak, 140 km south of Belgrade. "Sloboda" holds in its ownership app. 120 acres of land and app. 140000 m² of business, production and storage area. There are app. 2300 employees in the company.

Kompanija "Sloboda" AD has QMS certificate SRPS ISO 9001:2015.

TECHNOLOGICAL PROGRAM

Cold forming
Metal molding
Casting
Forging
Heat treatment
Galvanic protection
Chemical protection
Lacquering
Production and processing of pyrotechnical compounds
Water Jet technologies

DEVELOPMENT ACTIVITIES

Modernization of existing products as well as development and production of new products are key development activities of our company.

The development plans are related to requirements of domestic and world market.



KOMPANIJA "SLOBODA" AD

Ratka Mitrovića bb
32000 Čačak
Republic of Serbia
e-mail: slobexport@sloboda.co.rs
<http://www.sloboda.co.rs>
